



PRODUCT DIMENSIONS & SPECIFICATIONS

AAW SERIES VERTICAL WALL MOUNT ELECTRIC HEAT DX COOL AIR HANDLERS

STANDARD FEATURES

APPLICATION VERSATILITY

Front or bottom return air position. Offset hanging brackets attach to unit and wall to allow hanging inside closet. Can be AHRI matched with most brands of air conditioners or heat pumps. ETL listed for use with either R22 or R410a when a proper metering device is used.

LOW LEAKAGE CABINET

Less than 2% air leakage from cabinet when tested in accordance with ASHRAE standard 193. Unit must be installed according to Aspen installation instructions. Sturdy, fully insulated galvanized steel cabinet; stick pins ensure 1/2" insulation remains in place. Unit ships with disposable filter.

MODULAR ELECTRIC HEAT KITS

Heat kits available with either circuit breakers or terminal blocks. Available in 3, 5, 8, & 10 KW. Models with electric heat include sequencers and temperature limit switches for safe, efficient operation. Modules are easily installed in the field using molex plugs or can be ordered factory-installed. Controls are accessible from the front for easy service. Electrical connections can be made from the top or left. Disconnect does not protrude through the wall panel. Fan time delay relay standard for increased efficiency.

BLOWER

Direct drive multi-speed blowers circulate air quietly and efficiently. Motor speeds can be easily selected via motor terminals. Swing mounted blowers can be easily removed for service.

ELECTRONIC CIRCUIT BOARD

Electronic circuit board provides 30 secs ON/OFF blower time delay extracting more heat/cool from the coil.

DX COIL

High efficiency rifled copper tubes/enhanced aluminum fins provide maximum heat transfer. All coils immersion tested at 500 psi then nitrogen pressurized and factory sealed for maximum reliability. Liquid-line Schrader allows pre-installation pressure testing. Available with either check style flowrater or TXV metering device. Field-installable TXVs are also available. Galvanized metal drain pan with bottom primary and secondary drain connections or alternate right side primary. All connections 3/4" FPT. Access door allows for coil cleaning.

WARRANTY


Five-year limited parts warranty.

OPTIONS

See options menu.



Representative image only. Some models may vary in appearance. Due to continuous product improvement, specifications are subject to change without notice.

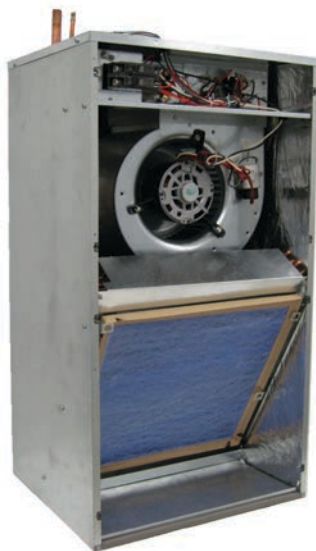

Phone: 281.441.6500
Toll Free: 800.423.9007
Fax: 281.441.6510
www.aspenmfg.com

HARDI
PROUD MEMBER

MEMBER
AHRI
AIR-CONDITIONING, HEATING,
& REFRIGERATION INSTITUTE
we make life better™



* For complete warranty details visit www.aspenmfg.com.

HEATING AND COOLING PERFORMANCE AND ELECTRICAL DATA

MODEL	HEAT KIT	PERFORMANCE DATA					ELECTRICAL DATA			
		NOMINAL COOLING (BTUS)	HEATING (KW)		HEATING CAPACITY (MBTUH)		MINIMUM CIRCUIT AMPACITY (MCA)		MAX BREAKER OR FUSE SIZE	
			208V	240V	208V	240V	208V	240V	208V	240V
AAW18	F(C,T)S00	18,000	0	0	0.0	0.0	2.3	2.3	15	15
	F(C,T)S03		2.25	3	7.8	10.2	15.8	17.9	20	20
	F(C,T)S05		3.8	5	13.0	17.1	24.8	28.3	25	30
	F(C,T)S08		6.0	8	20.8	27.3	38.3	43.9	35	40
	F(C,T)S10		7.5	10	25.9	34.1	47.3	54.3	50	60
AAW24	F(C,T)S00	24,000	0	0	0.0	0.0	2.3	2.3	15	15
	F(C,T)S03		2.25	3	7.8	10.2	15.8	17.9	20	20
	F(C,T)S05		3.8	5	13.0	17.1	24.8	28.3	25	30
	F(C,T)S08		6.0	8	20.8	27.3	38.3	43.9	35	40
	F(C,T)S10		7.5	10	25.9	34.1	47.3	54.3	50	60
AAW30	F(C,T)S00	30,000	0	0	0.0	0.0	3.3	3.3	15	15
	F(C,T)S03		2.25	3	7.8	10.2	16.8	18.9	20	20
	F(C,T)S05		3.8	5	13.0	17.1	25.8	29.3	25	30
	F(C,T)S08		6.0	8	20.8	27.3	39.3	44.9	40	45
	F(C,T)S10		7.5	10	25.9	34.1	48.3	55.3	50	60
AAW36	F(C,T)S00	36,000	0	0	0.0	0.0	3.3	3.3	15	15
	F(C,T)S03		2.25	3	7.8	10.2	16.8	18.9	20	20
	F(C,T)S05		3.8	5	13.0	17.1	25.8	29.3	25	30
	F(C,T)S08		6.0	8	20.8	27.3	39.3	44.9	40	45
	F(C,T)S10		7.5	10	25.9	34.1	48.3	55.3	50	60

BLOWER DATA

MODEL	MOTOR SPEED	MOTOR HP	MOTOR AMPS	MOTOR VOLTAGE	CFM V. EXTERNAL STATIC * †				
					0.10	0.20	0.30	0.40	0.50
AAW18/24	LOW	1/5	1.8	240	834	795	746	687	620
	HIGH				930	888	823	749	680
AAW30/36	LOW	1/3	2.6	240	1123	1094	1062	1034	1000
	HIGH				1396	1358	1313	1261	1200

* Wet coil with filter, † - For 208 V multiply by 0.90

AIR HANDLER CHASSIS NOMENCLATURE

AAW	18	F	-001
AAW = 240V PSC Motor Vertical Wall Mount	Nominal tonnage (MBTUH)	<u>Metering Device</u> 4 = non-bleed A/C or H/P R410 TXV B = 20% bleed A/C or H/P R22 TXV F = Flo-rater G = R410a Flo-rater X = non-bleed A/C or H/P R22 TXV	Option Code


ELECTRIC HEAT KIT NOMENCLATURE

F	C	S	05
Wall Mount Electric Heat	<u>Interruption</u> C = Circuit Breaker T = Terminal Block	S = 18 - 36	Heat strip 03 = 3 KW 05 = 5 KW 08 = 8 KW 10 = 10KW

DIMENSIONS AND SPECIFICATIONS (In. [mm]) (Fig 1)

MODEL	A	B	C	D	E	F	FILTER SIZE	PISTON SIZE	SHIP WEIGHT [LBS]	SKID QTY
AAW18*	37 1/2 [95]	22 [56]	18-3/4 [48]	14 [36]	10 [25]	3-1/4 [8.3]	20X20	0.055	90	4
AAW24*	37 1/2 [95]	22 [56]	18-3/4 [48]	14 [36]	10 [25]	3-1/4 [8.3]	20X20	0.059	90	4
AAW30*	40 1/2 [103]	22 [56]	18-3/4 [48]	14 [36]	11-1/2 [29]	1-3/8 [3.5]	20X20	0.068	102	4
AAW36*	40 1/2 [103]	22 [56]	18-3/4 [48]	14 [36]	11-1/2 [29]	1-3/8 [3.5]	20X20	0.074	102	4


Fig 1

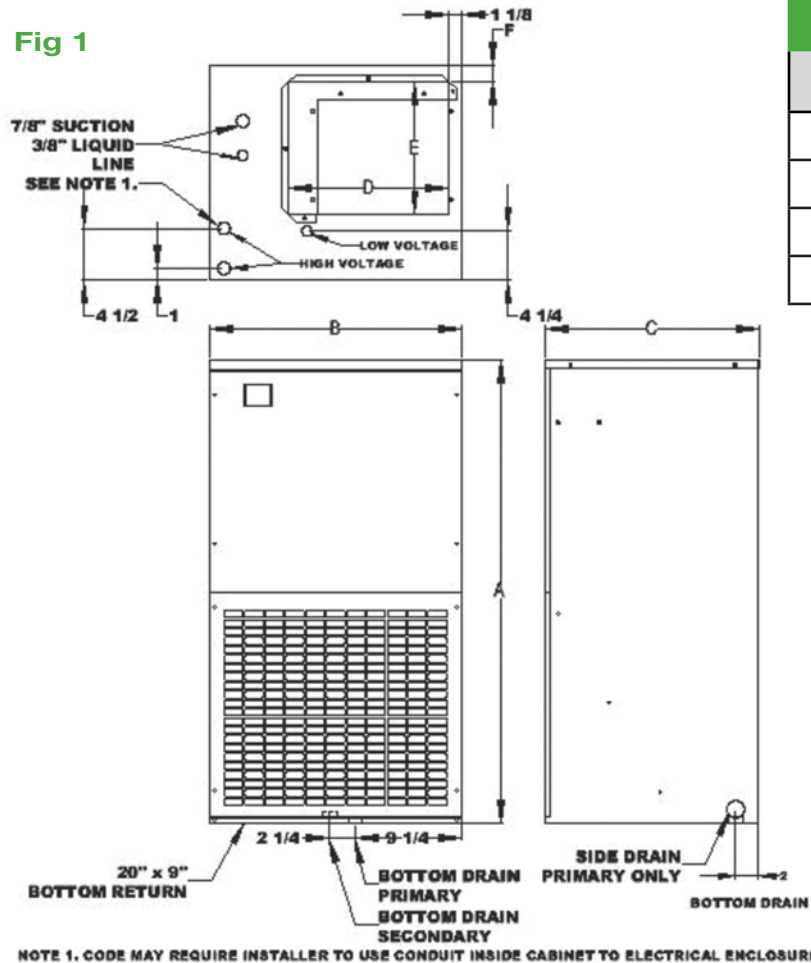

INSTALLATION CLEARANCES

	OPERATION	SERVICE
TOP	0"	0"
FRONT	0"	30"
SIDES	0"	0"
REAR	0"	0"

Fig 2

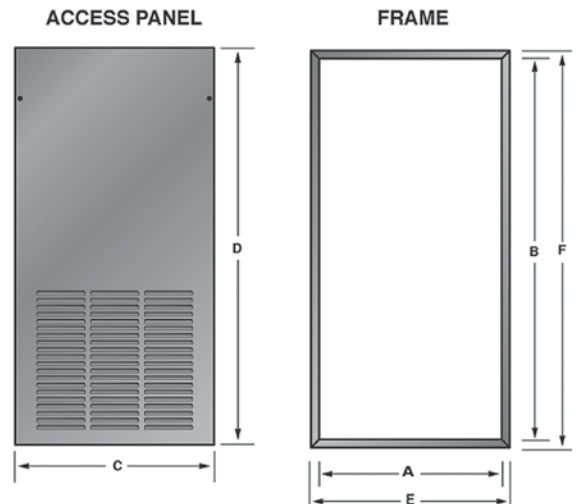

DIMENSIONS AND SPECIFICATIONS (Fig 2)

PANEL MODEL	FOR USE WITH	FINISH	OPENING SIZE		PANEL DIMENSION		FRAME DIMENSION		# OF PANELS
			A"	B"	C"	D"	E"	F"	
WAD-7(S/L)	AAW 18/24	Embossed	22 1/4	39 1/2	24 1/4	41 1/2	24 1/8	41 3/8	1
WAD-8(S/L)	AAW 30/36	Embossed	22 1/4	42 1/2	24 1/4	44 1/2	24 1/8	44 3/8	1
WAD-18(S/L)	AAW 18/24	Smooth	22 1/4	39 1/2	24 1/4	41 1/2	24 1/8	41 3/8	1
WAD-19(S/L)	AAW 30/36	Smooth	22 1/4	42 1/2	24 1/4	44 1/2	24 1/8	44 3/8	1