


Job Name:	
Tag#	



Submittal Data Sheet	CDXS15LVJU
1.25-Ton Ducted Concealed Indoor Unit	

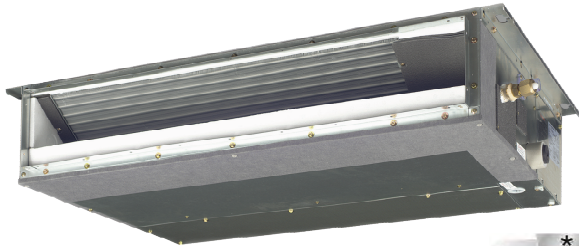

Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. *If product is installed in a commercial application, limited warranty period is 5 years.*

Indoor Specifications				
	Cooling		Heating	
	H	M	H	M
Airflow Rate (cfm)	424	388	424	388
	L	SL	L	SL
	353	297	353	297
Sound (dBA) H / M / L / SL	37 / 35 / 33 / 31		37 / 35 / 33 / 31	
Dimensions (H x W x D) (in)	7-7/8 x 35-7/16 x 24-7/16			
Weight (Lbs)	60			
Nominal Capacity (Btu/hr)	15,000			


*See Outdoor Unit for Rated Capacities

Piping	
Liquid (in)	1/4
Gas (in)	1/2
Drain (in)	25/32

	Electrical	
	Cooling	Heating
Running Current (Rated) (A)	.79/.79*	.79/.79*
Power Consumption (Rated) (W)	172/172*	172/172*

*208/230V

CDXS15LVJU Dimensional Data

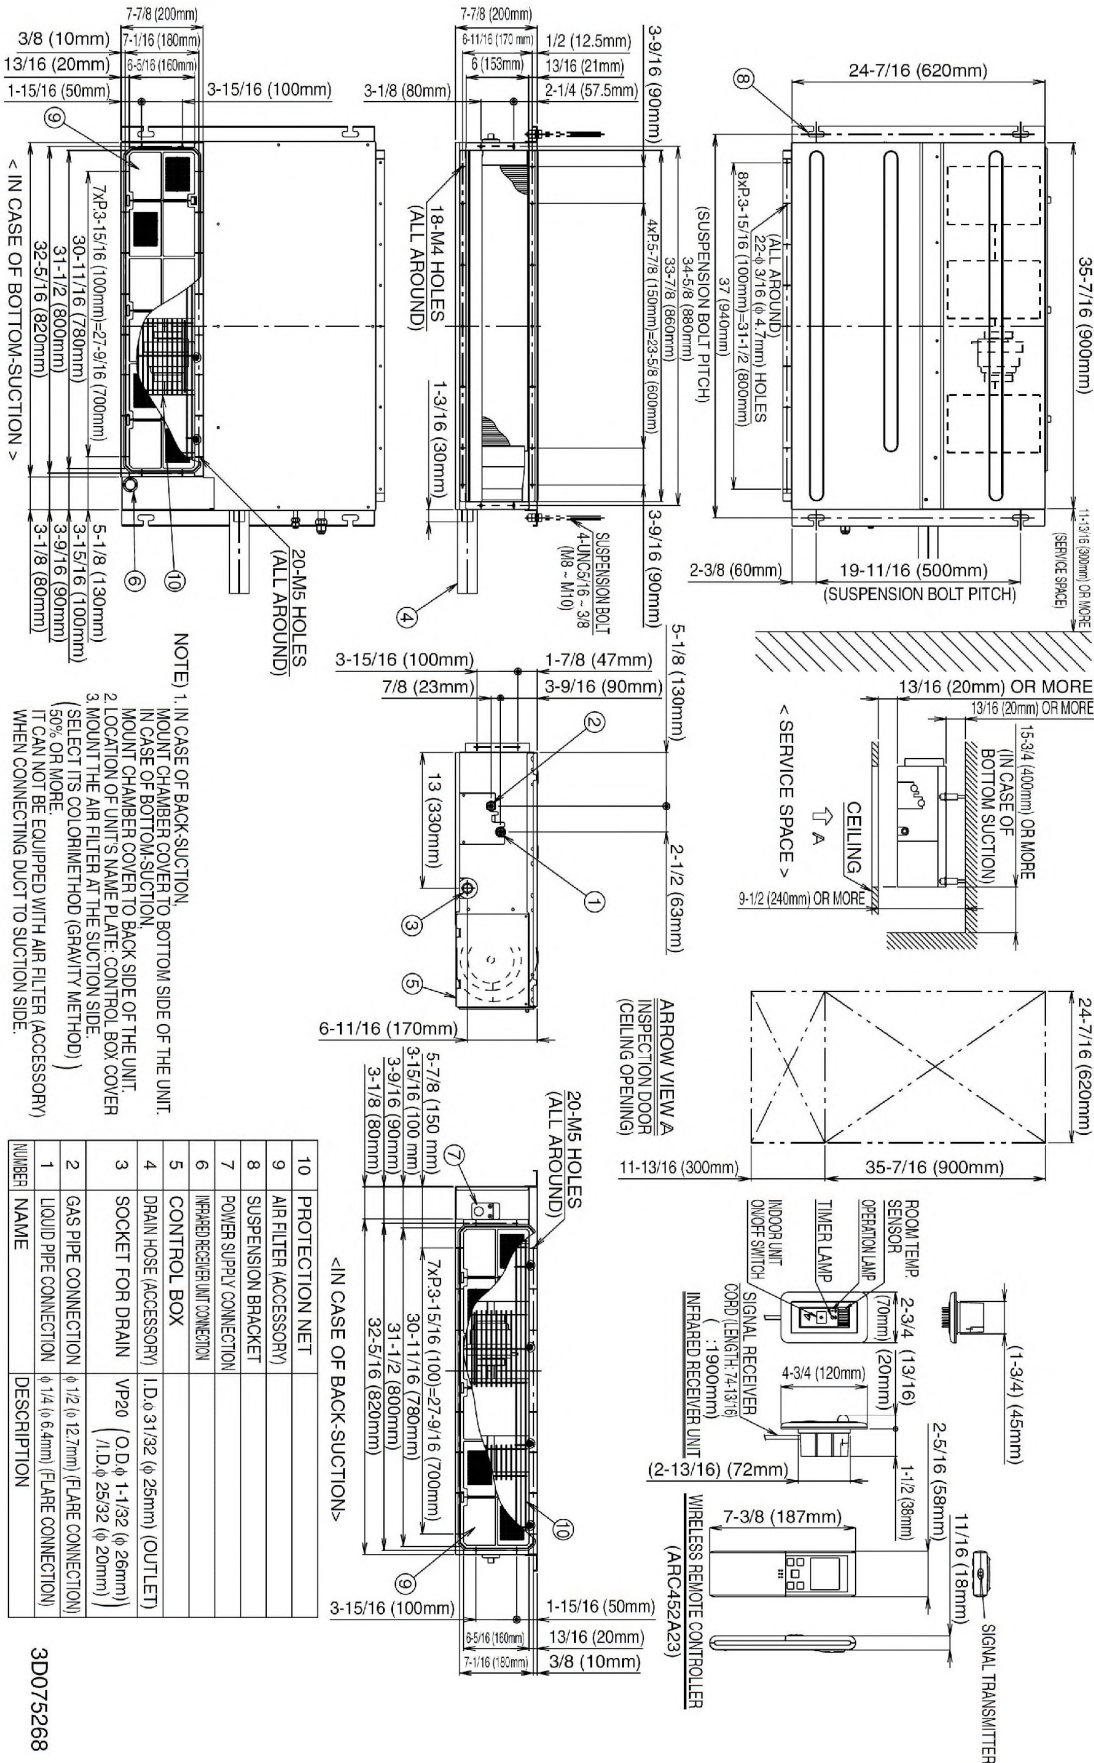


Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Included	Part Number	Description
	BRP072A43	Wireless Interface Adapter
	BRC944B2-A08	Wired Remote Controller
	BRCW901A08	Wired Remote Controller Cable – 25 ft (included in above kit)
	BRCW901A03	Wired Remote Controller Cable – 10ft
	DACA-ARCW901P10	IR Receiver Cable, Plenum Rated, 10ft (FDXS Only)
	DACA-ARCW901P25	IR Receiver Cable, Plenum Rated, 25ft (FDXS Only)
	DACA-TS1-1	Daikin ENVi Intelligent Thermostat Kit
	DACA-CP2-1	Maxi Orange Condensate Pump
	DACA-CP3-1	Mini Condensate Pump 5 gph
	KRP928BB2S	Interface adaptor for DIII-NET
	KDT25N50	15, 18 Class Insulation kit for high humidity

External Static Pressure / Airflow Chart

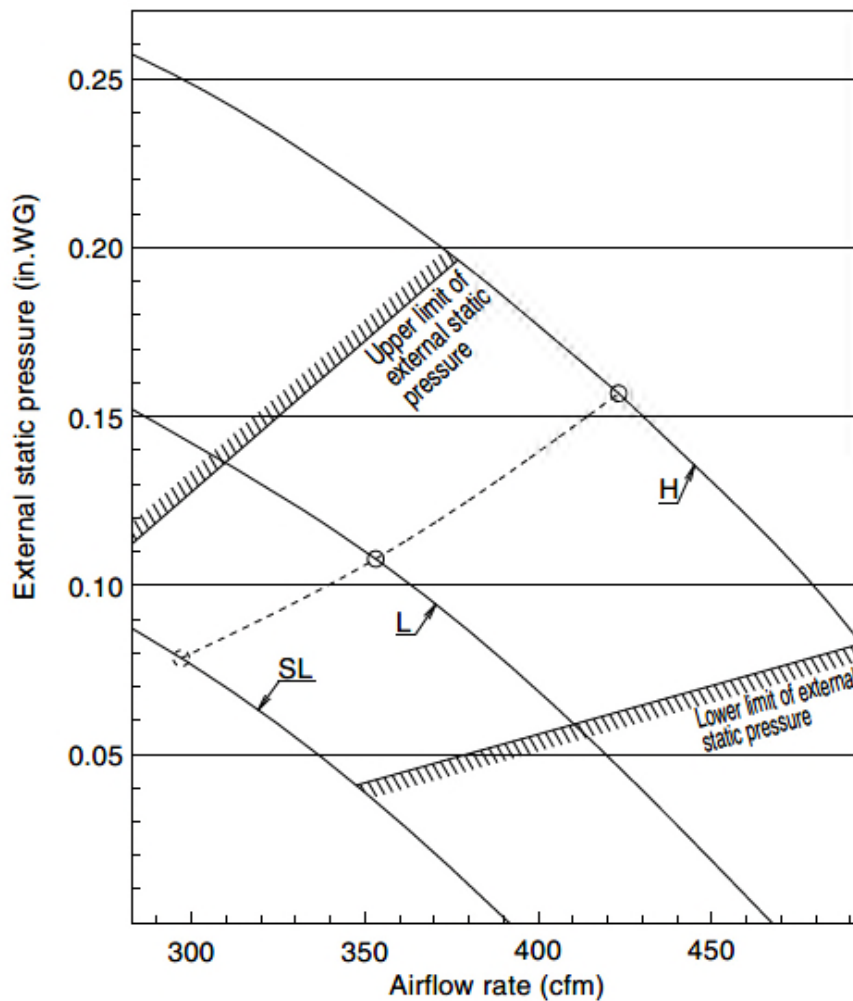


Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Job Name:	
Tag#	



Submittal Data Sheet	CDXS18LVJU
1.5-Ton Ducted Concealed Indoor Unit	

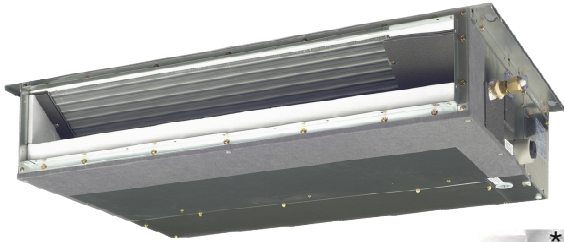

Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. *If product is installed in a commercial application, limited warranty period is 5 years.*


Electrical		*208/230V
	Cooling	Heating
Running Current (Rated) (A)	.79/.79*	.79/.79*
Power Consumption (Rated) (W)	172/172*	172/172*

Indoor Specifications				
	Cooling		Heating	
	H	M	H	M
Airflow Rate (cfm)	424	388	424	388
	L	SL	L	SL
	353	297	353	297
Sound (dBA) H / M / L / SL	37 / 35 / 33 / 31		37 / 35 / 33 / 31	
Dimensions (H x W x D) (in)	7-7/8 x 35-7/16 x 24-7/16			
Weight (Lbs)	60			
Nominal Capacity (Btu/hr)	18,000			

*See Outdoor Unit for Rated Capacities

Piping	
Liquid (in)	1/4
Gas (in)	1/2
Drain (in)	25/32

CDXS18LVJU Dimensional Data

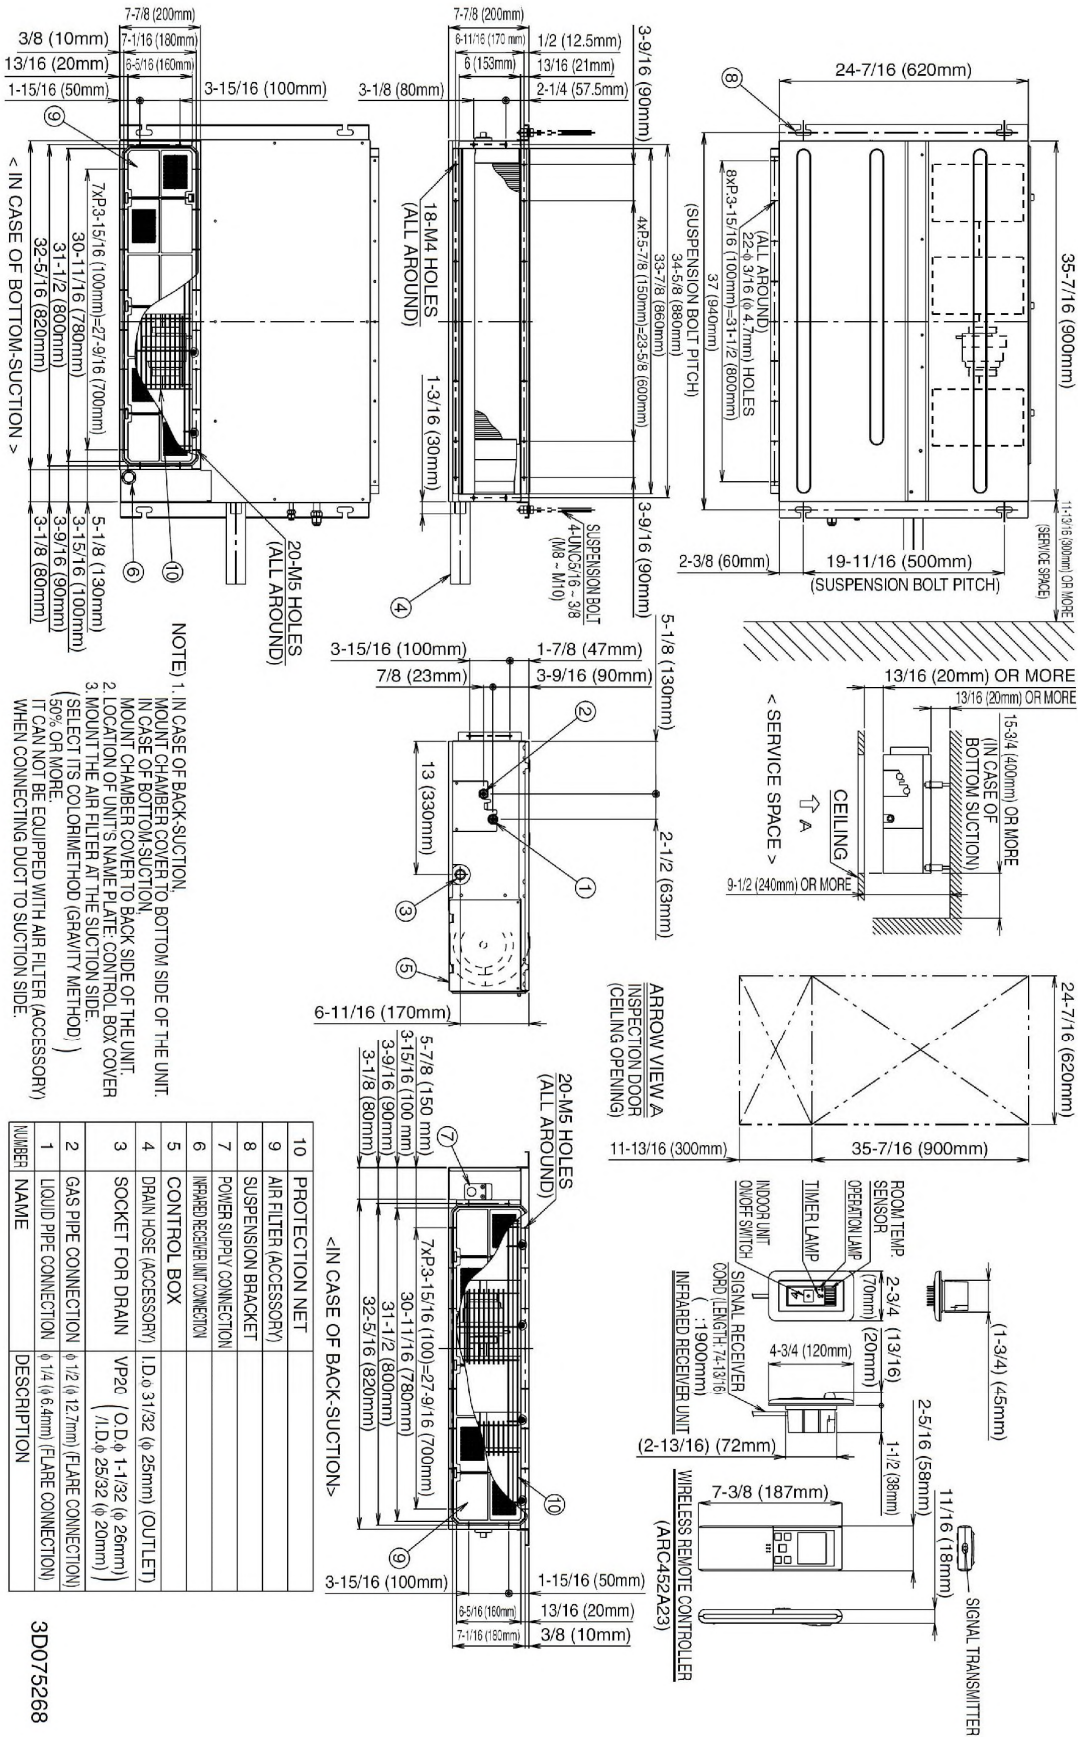

NOTE: 1. IN CASE OF BACK SUCTION, MOUNT CHAMBER COVER TO BOTTOM SIDE OF THE UNIT. IN CASE OF BOTTOM SUCTION, MOUNT CHAMBER COVER TO BACK SIDE OF THE UNIT. 2. LOCATION OF UNIT'S NAME PLATE, CONTROL BOX COVER 3. MOUNT THE AIR FILTER AT THE SUCTION SIDE. (SELECT ITS COLORMETHOD (GRAVITY METHOD) 50% OR MORE IT CAN NOT BE EQUIPPED WITH AIR FILTER (ACCESSORY) WHEN CONNECTING DUCT TO SUCTION SIDE.

NUMBER	NAME	DESCRIPTION
10	PROTECTION NET	
9	AIR FILTER (ACCESSORY)	
8	SUSPENSION BRACKET	
7	POWER SUPPLY CONNECTION	
6	INFRARED RECEIVER UNIT CONNECTION	
5	CONTROL BOX	
4	DRAIN HOSE (ACCESSORY)	1.D.φ 31/32 (φ 25mm) (OUTLET)
3	SOCKET FOR DRAIN	VP2C (O.D.φ 1-1/32 (φ 26mm) / I.D.φ 25/32 (φ 20mm))
2	GAS PIPE CONNECTION	φ 1/2 (φ 12.7mm) (FLARE CONNECTION)
1	LIQUID PIPE CONNECTION	φ 1/4 (φ 6.4mm) (FLARE CONNECTION)

3D075268


Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submission Revision Date: January 2018

Included	Part Number	Description
	BRP072A43	Wireless Interface Adapter
	BRC944B2-A08	Wired Remote Controller kit
	BRCW901A08	Wired Remote Controller Cable – 25 ft (included in above kit)
	BRCW901A03	Wired Remote Controller Cable – 10ft
	DACA-ARCW901P10	IR Receiver Cable, Plenum Rated, 10ft
	DACA-ARCW901P25	IR Receiver Cable, Plenum Rated, 25ft
	DACA-TS1-1	Daikin ENVi Intelligent Thermostat Kit
	DACA-CP2-1	Maxi Orange Condensate Pump
	DACA-CP3-1	Mini Condensate Pump 5 gph
	KRP928BB2S	Interface adaptor for DIII-NET
	KDT25N50	15, 18 Class Insulation kit for high humidity

External Static Pressure / Airflow Chart

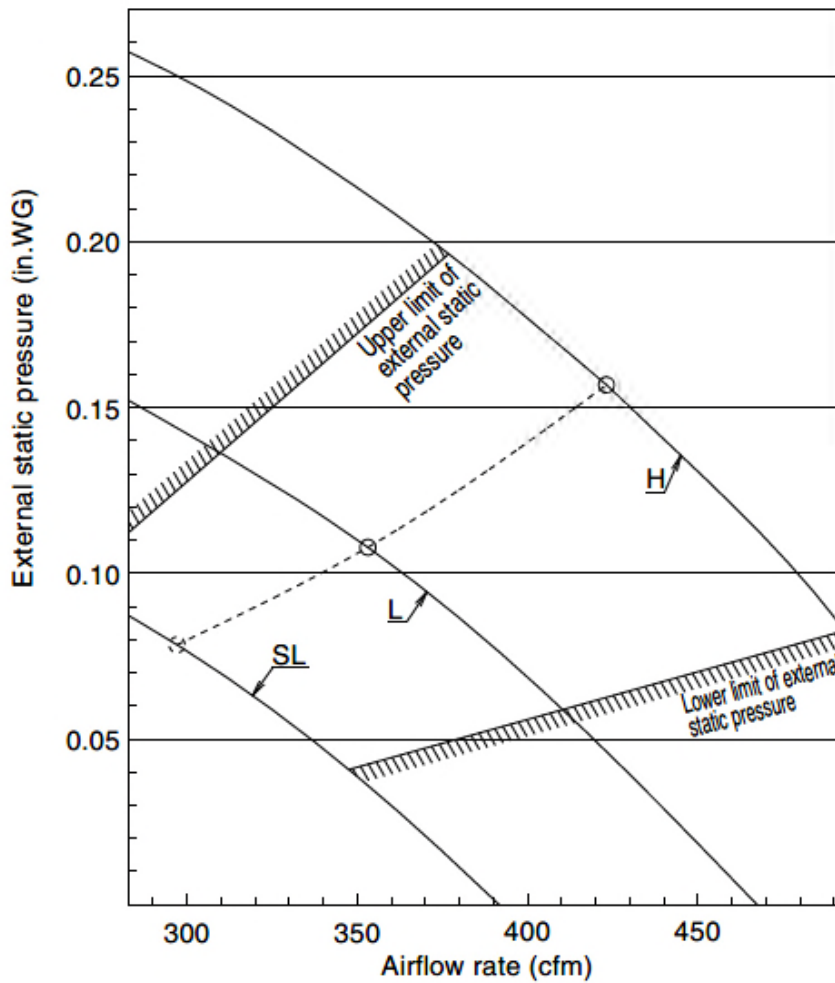


Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Job Name:	
Tag#	



Submittal Data Sheet	CDXS24LVJU
2-Ton Ducted Concealed Indoor Unit	

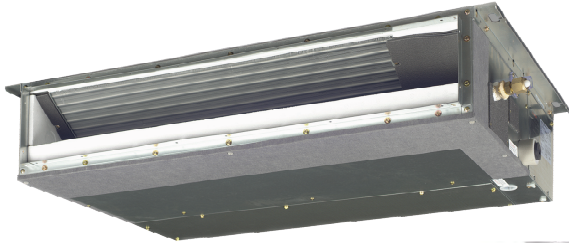

Indoor Specifications				
	Cooling		Heating	
	H	M	H	M
Airflow Rate (cfm)	565	523	565	523
	L	SL	L	SL
	477	395	477	395
Sound (dBA) H / M / L / SL	38 / 36 / 34 / 32		38 / 36 / 34 / 32	
Dimensions (H x W x D) (in)	7-7/8 x 43-5/16 x 24-7/16			
Weight (Lbs)	66			
Nominal Capacity (Btu/hr)	24,000			

*See Outdoor Unit for Rated Capacities


Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. *If product is installed in a commercial application, limited warranty period is 5 years.*

Piping	
Liquid (in)	1/4
Gas (in)	5/8
Drain (in)	25/32

Electrical		
	Cooling	Heating
Running Current (Rated) (A)	.79/.79*	.79/.79*
Power Consumption (Rated) (W)	160/160*	160/160*

*208/230V

CDXS24LVJU Dimensional Data

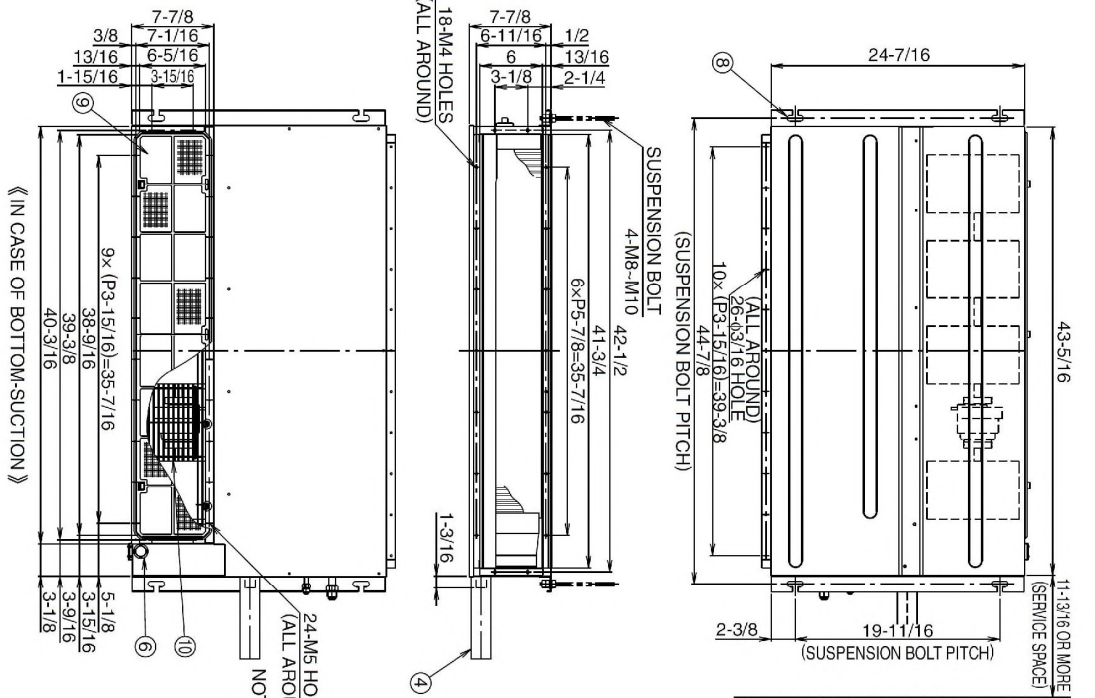

《IN CASE OF BOTTOM-SUCTION》


NOTE 1. IN CASE OF BACK-SUCTION, MOUNT CHAMBER COVER TO BOTTOM SIDE OF THE UNIT.
 IN CASE OF BOTTOM-SUCTION, MOUNT CHAMBER COVER TO BACK SIDE OF THE UNIT.
 2. LOCATION OF UNIT'S NAME PLATE: CONTROL BOX COVER (SELECT ITS COLOR/METHOD (GRAVITY METHOD) 50% OR MORE.
 IT CAN NOT BE EQUIPPED WITH AIR FILTER (ACCESSORY) WHEN CONNECTING DUCT TO SUCTION SIDE.

1. IN CASE OF BACK-SUCTION, MOUNT CHAMBER COVER TO BOTTOM SIDE OF THE UNIT.
2. LOCATION OF UNIT'S NAME PLATE: CONTROL BOX COVER (SELECT ITS COLOR/METHOD (GRAVITY METHOD) 50% OR MORE.
3. MOUNT THE AIR FILTER AT THE SUCTION SIDE.




《IN CASE OF BACK-SUCTION》

NUMBER	NAME	DESCRIPTION
10	PROTECTION NET	
9	AIR FILTER (STANDARD ACCESSORY)	
8	SUSPENSION BRACKET	
7	POWER SUPPLY CONNECTION	
6	INFRARED RECEIVER UNIT CONNECTION	
5	CONTROL BOX	
4	DRAIN HOSE (STANDARD ACCESSORY)	1.D. 0.31/32 (OUTLET)
3	SOCKET FOR DRAIN	VP20 (O.D. φ1-1/32/1.D. φ25/32)
2	GAS PIPE CONNECTION	0.5/8 (FLARE CONNECTION)
1	LIQUID PIPE CONNECTION	φ1/4 (FLARE CONNECTION)

3D0080591



ARROW VIEW A
 INSPECTION DOOR
 (CEILING OPENING)

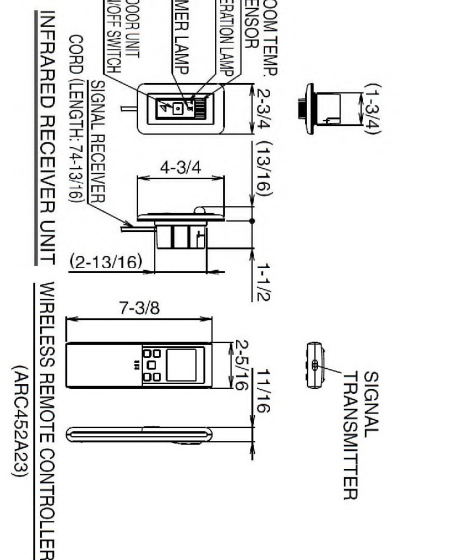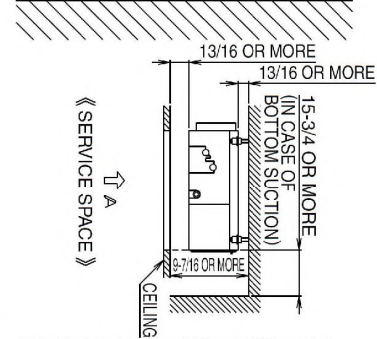

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056


(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Optional Accessories



Included	Part Number	Description
	BRP072A43	Wireless Interface Adapter
	BRC944B2-A08	Wired Remote Controller kit
	BRCW901A08	Wired Remote Controller Cable – 25 ft (included in above kit)
	BRCW901A03	Wired Remote Controller Cable – 10 ft
	DACA-ARCW901P10	IR Receiver Cable, Plenum Rated, 10ft
	DACA-ARCW901P25	IR Receiver Cable, Plenum Rated, 25ft
	DACA-TS1-1	Daikin ENVi Intelligent Thermostat Kit
	DACA-CP2-1	Maxi Orange Condensate Pump
	DACA-CP3-1	Mini Condensate Pump 5 gph
	KRP928BB2S	Interface adaptor for DIII-NET

External Static Pressure / Airflow Chart

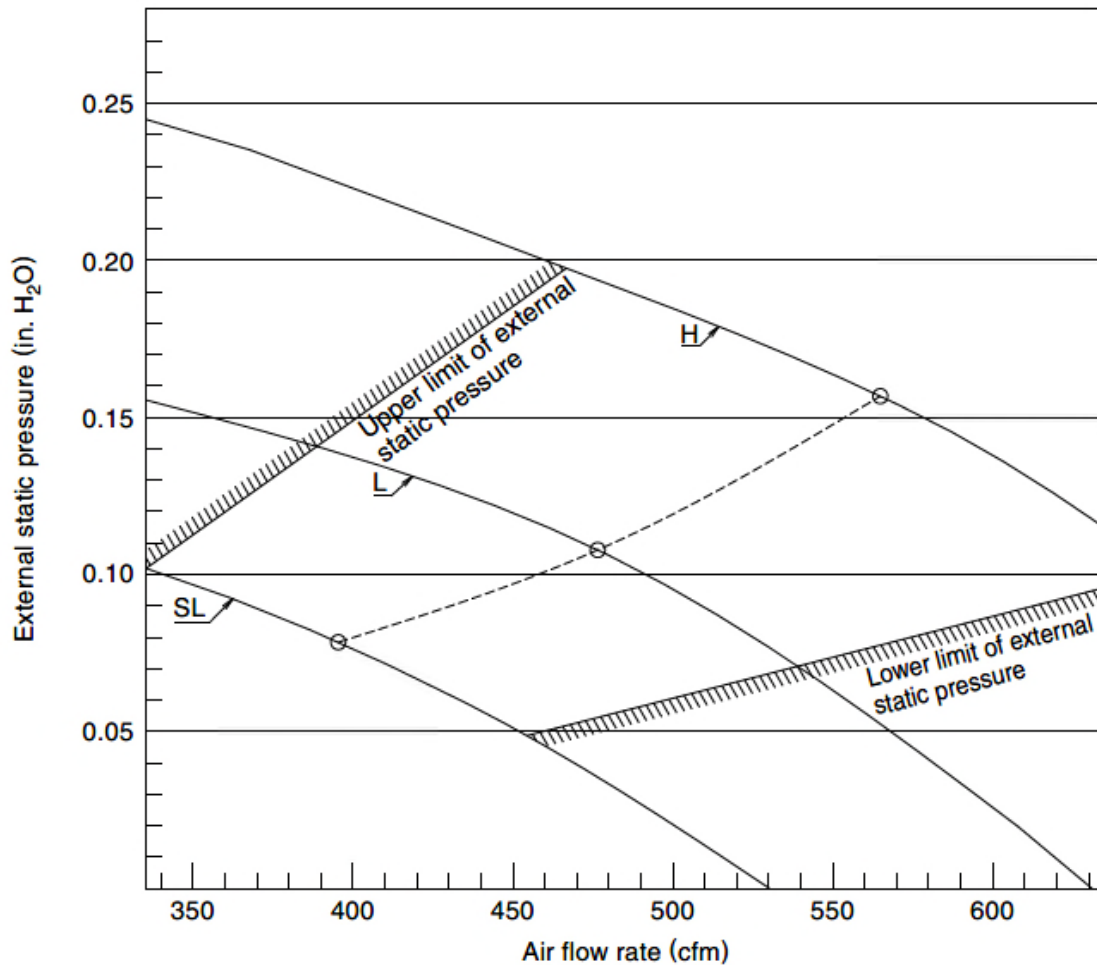

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)