

GPG13M

2- TO 5-TON

PACKAGED GAS/ELECTRIC UNITS

13 SEER / 80% AFUE

COOLING CAPACITIES: 23,600 TO 57,000 BTU/H

HEATING CAPACITIES: 46,000 TO 138,000 BTU/H



Standard Features

- High-efficiency compressor
- Durable, corrosion-resistant T-140 aluminized steel tubular heat exchanger
- Copper tube/aluminum fin coil with flowrater expansion device
- Recirculating blower motor: PSC type on 2- to 3½-ton units; X-13 type on 4- and 5-ton units
- Fully charged R-410A system
- Redundant gas valve and easy conversion to propane
- Power-assisted combustion
- Direct spark ignition system includes a micro-processor-based control for the entire ignition sequence, all blower operation, and all safety circuits complete with self-diagnostics
- All models comply with California Low NOx standards
- AHRI Certified; ETL Listed

Cabinet Features

- High-quality UV-resistant powder-paint finish
- Horizontal or downflow application
- Convenient access panels
- One roof curb fits all units
- Fully insulated cabinet
- Bottom, 2" high base rails for easier handling
- All GPG13M models fit in a standard-size pick-up truck
- When properly anchored, meets the 2001 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)

Contents

Nomenclature	2
Product Specifications	3
Expanded Cooling Data	11
Airflow Data	23
Dimensions	25
Wiring Diagrams	26
Accessories	28



* Complete warranty details available from your local dealer or at www.amana-hac.com. To receive the 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec.

NOMENCLATURE

	G	P	G	13	24	045	M	4	1	
	1	2	3	4,5	6,7	8,9,10	11	12	13	
Brand	G Goodman® Brand									Electrical
										1 208-230/1/60
Product Category	P Packaged Unit									3 208-230/3/60
										Refrigerant
Unit Type	G Gas/Electric									2 R-22
										4 R-410A
Efficiency	13 13 SEER									Configuration
	15 15 SEER									H Horizontal
										M Multi-Position
Nominal Capacity										Heat Input
										45 46 MBTU/h
24 2 Tons	42 3½ Tons									70 69 MBTU/h
30 2½ tons	48 4 Tons									90 92 MBTU/h
36 3 Tons	60 5 Tons									115 115 MBTU/h
										140 138 MBTU/h



SPECIFICATIONS — GPG1324

	GPG1324 045M41A*	GPG1324 045M41B*	GPG1324 045M41C*	GPG1324 045M41D*	GPG1324 070M41A*	GPG1324 070M41B*	GPG1324 070M41C*	GPG1324 070M41D*
COOLING CAPACITY								
Total BTU/h	23,600	23,600	23,600	22,800	23,600	23,600	23,600	22,800
Sensible BTU/h	18,800	18,800	18,800	17,100	18,800	18,800	18,800	17,100
SEER / EER	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0
Decibels	78	78	78	78	78	78	78	78
AHRI Reference #s	4385090	5360599	5495270	5732581	4385090	5360599	5495270	5732581
HEATING CAPACITY								
Input BTU/h	46,000	46,000	46,000	46,000	46,000	46,000	46,000	46,000
Output BTU/h	36,700	36,700	36,700	36,700	36,700	36,700	36,700	36,700
AFUE	80	80	80	80	80	80	80	80
Temperature Rise Range	30 - 60	30 - 60	30 - 60	30 - 60	35 - 65	35 - 65	35 - 65	35 - 65
No. of Burners	2	2	2	2	3	3	3	3
Orifice Size (Natural/Propane)	43 / 55	43 / 55	43 / 55	43 / 55	43 / 55	43 / 55	43 / 55	43 / 55
EVAPORATOR MOTOR								
Type	PSC	PSC	PSC	PSC	PSC	PSC	PSC	PSC
Wheel (D x W)	10" x 8"	10" x 8"	10" x 8"	10" x 8"	10" x 8"	10" x 8"	10" x 8"	10" x 8"
Indoor Nominal CFM	800	800	800	800	800	800	800	800
Motor Speed Tap (Cooling)	Med	Med	Med	Med	Med	Med	Med	Med
RPM/Amps (Cooling)	952/1.5	952/1.5	952/1.5	952/1.5	952/1.5	952/1.5	952/1.5	952/1.5
Horsepower	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4
EVAPORATOR COIL								
Face Area (ft ²)	4.33	4.33	4.33	4.33	4.33	4.33	4.33	4.33
Rows Deep/Fins per Inch	3/16	3/14	3/16	3/14	3/16	3/14	3/16	3/16
Piston Size (Cooling)	0.053	0.057	0.057	0.057	0.053	0.057	0.057	0.057
Filter Size (ft ²)	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7
Drain Size (NPT)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Refrigerant Charge (oz.)	80	68	68	75	80	68	68	75
CONDENSER FAN / COIL								
Horsepower - RPM	1/4 - 830	1/6 - 830	1/6 - 830	1/6 - 830	1/4 - 830	1/6 - 830	1/6 - 830	1/6 - 830
Diameter / # of Blades	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3
Outdoor Nominal CFM	2,400	2,400	2,400	2,400	2,400	2,400	2,400	2,400
Face Area (ft ²)	12.3	6.94	6.94	12.3	12.3	6.94	6.94	12.3
Rows Deep/Fins per Inch	1/24	2/27	2/27	1/24	1/24	2/27	2/27	1/24
COMPRESSOR								
Quantity / Type	1 / Recip	1 / Scroll	1 / Scroll	1 / Rotary	1 / Recip	1 / Scroll	1 / Scroll	1 / Rotary
Stage	Single	Single	Single	Single	Single	Single	Single	Single
Compressor RLA/LRA	8.3 / 43.0	13.5 / 58.3	13.5 / 58.3	7.7 / 37	8.3 / 43.0	13.5 / 58.3	13.5 / 58.3	7.7 / 37
ELECTRICAL DATA								
Voltage-Phase (60 Hz)	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1
Indoor Blower FLA/LRA	1.5 / 2.2	1.5 / 2.2	1.5 / 2.2	1.5 / 2.2	1.5 / 2.2	1.5 / 2.2	1.5 / 2.2	1.5 / 2.2
Outdoor Fan FLA/LRA	1.5 / 3.0	1.1 / 1.7	1.1 / 1.7	1.1 / 1.7	1.5 / 3.0	1.1 / 1.7	1.1 / 1.7	1.1 / 1.7
Total Unit Amps	11.3	16.1	16.1	10.3	11.3	16.1	16.1	10.3
Min. Circuit Ampacity	13.4	19.5	19.5	12.2	13.4	19.5	19.5	12.2
Max. Overcurrent Protection	20 amps	30 amps	30 amps	15 amps	20 amps	30 amps	30 amps	15 amps
Entrance Size Power Supply	1 1/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"
Entrance Size Control Voltage	7/8"	7/8"	7/8"	7/8"	7/8"	7/8"	7/8"	7/8"
Operating / Ship Weights (lbs)	412 / 435	392 / 415	396 / 420	392 / 415	417 / 439	392 / 420	397 / 425	397 / 425

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

SPECIFICATIONS — GPG1330

	GPG1330 045M41A*	GPG1330 045M41B*	GPG1330 045M41C*	GPG1330 070M41A*	GPG1330 070M41B*	GPG1330 070M41C*
COOLING CAPACITY						
Total BTU/h	28,600	28,600	28,600	28,600	28,600	28,600
Sensible BTU/h	22,600	22,600	22,600	22,600	22,600	22,600
SEER / EER	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0
Decibels	78	78	78	78	78	78
AHRI Reference #s	4385091	5360600	5495271	4385091	5360600	5495271
HEATING CAPACITY						
Input BTU/h	46,000	46,000	46,000	69,000	69,000	69,000
Output BTU/h	36,700	36,700	36,700	55,000	55,000	55,000
AFUE	80	80	80	80	80	80
Temperature Rise Range	30 - 60	30 - 60	30 - 60	35 - 65	35 - 65	35 - 65
No. of Burners	2	2	2	3	3	3
Orifice Size (Natural/Propane)	43 / 55	43 / 55	43 / 55	43 / 55	43 / 55	43 / 55
EVAPORATOR MOTOR						
Type	PSC	PSC	PSC	PSC	PSC	PSC
Wheel (D x W)	10" x 8"	10" x 8"	10" x 8"	10" x 8"	10" x 8"	10" x 8"
Indoor Nominal CFM	1,000	1,000	1,000	1,000	1,000	1,000
Motor Speed Tap (Cooling)	Med	Med	Med	Med	Med	Med
RPM/Amps (Cooling)	1,015/1.85	1,015/1.85	1,015/1.85	1,015/1.85	1,015/1.85	1,015/1.85
Horsepower	1/3	1/3	1/3	1/3	1/3	1/3
EVAPORATOR COIL						
Face Area (ft ²)	4.33	4.33	4.33	4.33	4.33	4.33
Rows Deep/Fins per Inch	4/16	3/14	4/16	4/16	3/14	4/16
Piston Size (Cooling)	0.062	0.062	0.062	0.062	0.062	0.062
Filter Size (ft ²)	3.3	3.3	3.3	3.3	3.3	3.3
Drain Size (NPT)	¾"	¾"	¾"	¾"	¾"	¾"
Refrigerant Charge (oz.)	80	78	78	80	78	78
CONDENSER FAN / COIL						
Horsepower - RPM	1/4 - 1,100	1/4 - 1,100	1/4 - 1,100	1/4 - 1,100	1/4 - 1,100	1/4 - 1,100
Diameter / # of Blades	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3
Outdoor Nominal CFM	2,700	2,700	2,700	2,700	2,700	2,700
Face Area (ft ²)	12.3	12.3	12.3	12.3	12.3	12.3
Rows Deep/Fins per Inch	1/24	1/24	1/24	1/24	1/24	1/24
COMPRESSOR						
Quantity / Type	1 / Recip	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll
Stage	Single	Single	Single	Single	Single	Single
Compressor RLA/LRA	10.6 / 54.0	14.1 / 73	14.1 / 73	10.6 / 54.0	14.1 / 73	14.1 / 73
ELECTRICAL DATA						
Voltage-Phase-Frequency	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60
Indoor Blower FLA/LRA	1.9 / 3.1	1.9 / 3.1	1.9 / 3.1	1.9 / 3.1	1.9 / 3.1	1.9 / 3.1
Outdoor Fan FLA/LRA	1.4 / 2.9	1.5 / 3	1.5 / 3	1.4 / 2.9	1.5 / 3	1.5 / 3
Total Unit Amps	13.9	17.5	17.5	13.9	17.5	17.5
Min. Circuit Ampacity	16.6	20.9	20.9	16.6	20.9	20.9
Max. Overcurrent Protection	25 amps	35 amps	35 amps	25 amps	35 amps	35 amps
Entrance Size Power Supply	1½"	1½"	1½"	1½"	1½"	1½"
Entrance Size Control Voltage	⅞"	⅞"	⅞"	⅞"	⅞"	⅞"
Operating / Ship Weights (lbs)	415 / 438	393 / 416	397 / 421	420 / 442	393 / 421	399 / 425

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

SPECIFICATIONS — GPG1336

	GPG1336 045M41C*	GPG1336 045M41B*	GPG1336 045M41D*	GPG1336 070M41B*	GPG1336 070M41C*	GPG1336 070M41D*	GPG1336 090M41B*	GPG1336 090M41C*	GPG1336 090M41D*
COOLING CAPACITY									
Total BTU/h	35,000	35,000	35,000	35,000	35,000	35,000	35,000	35,000	35,000
Sensible BTU/h	27,800	27,800	27,800	27,800	27,800	27,800	27,800	27,800	27,800
SEER / EER	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0
Decibels	78	78	78	78	78	78	78	78	78
AHRI Reference #s	5035714	5360601	5495272	5360601	5035714	5495272	5360601	5035714	5495272
HEATING CAPACITY									
Input BTU/h	46,000	46,000	46,000	69,000	69,000	69,000	92,000	92,000	92,000
Output BTU/h	36,700	36,700	36,700	55,000	55,000	55,000	73,600	73,600	73,600
AFUE	80	80	80	80	80	80	80	80	80
Temperature Rise Range	30 - 60	30 - 60	30 - 60	35 - 65	35 - 65	35 - 65	45 - 75	45 - 75	45 - 75
No. of Burners	2	2	2	3	3	3	4	4	4
Orifice Size (Natural/Propane)	43 / 55	43 / 55	43 / 55	43 / 55	43 / 55	43 / 55	43 / 55	43 / 55	43 / 55
EVAPORATOR MOTOR									
Type	PSC	PSC	PSC	PSC	PSC	PSC	PSC	PSC	PSC
Wheel (D x W)	10" x 9"	10" x 9"	10" x 9"	10" x 9"	10" x 9"	10" x 9"	10" x 9"	10" x 9"	10" x 9"
Indoor Nominal CFM	1,250	1,250	1,250	1,250	1,250	1,250	1,250	1,250	1,250
Motor Speed Tap (Cooling)	Med	Med	Med	Med	Med	Med	Med	Med	Med
RPM/Amps (Cooling)	910/3.06	910/3.06	910/3.06	910/3.06	910/3.06	910/3.06	910/3.06	910/3.06	910/3.06
Horsepower	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
EVAPORATOR COIL									
Face Area (ft ²)	4.33	4.33	4.33	4.33	4.33	4.33	4.33	4.33	4.33
Rows Deep/Fins per Inch	4/14	4/14	4/14	4/14	4/14	4/14	4/14	4/14	4/14
Piston Size (Cooling)	0.07	0.068	0.068	0.068	0.070	0.068	0.068	0.07	0.068
Filter Size (ft ²)	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2
Drain Size (NPT)	¾"	¾"	¾"	¾"	¾"	¾"	¾"	¾"	¾"
Refrigerant Charge (oz.)	85	70	70	70	85	70	70	85	70
CONDENSER FAN / COIL									
Horsepower - RPM	1/4 - 830	1/4 - 830	1/4 - 830	1/4 - 830	1/4 - 830	1/4 - 830	1/4 - 830	1/4 - 830	1/4 - 830
Diameter / # of Blades	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3
Outdoor Nominal CFM	2,400	2,400	2,400	2,400	2,400	2,400	2,400	2,400	2,400
Face Area (ft ²)	12.2	8.8	8.8	8.8	12.2	8.8	8.8	12.2	8.8
Rows Deep/Fins per Inch	2/16	2/27	2/27	2/27	2/16	2/27	2/27	2/16	2/27
COMPRESSOR									
Quantity / Type	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll
Stage	Single	Single	Single	Single	Single	Single	Single	Single	Single
Compressor RLA/LRA	16.7/79.0	16.7/79.0	16.7/79.0	16.7/79.0	16.7/79.0	16.7/79.0	16.7/79.0	16.7/79.0	16.7/79.0
ELECTRICAL DATA									
Voltage-Phase (60 Hz)	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1
Indoor Blower FLA/LRA	3.06/4.1	3.06/4.1	3.06/4.1	3.06/4.1	3.06/4.1	3.06/4.1	3.06/4.1	3.06/4.1	3.06/4.1
Outdoor Fan FLA/LRA	1.5 / 3.0	1.5 / 3.0	1.5 / 3.0	1.5 / 3.0	1.5 / 3.0	1.5 / 3.0	1.5 / 3.0	1.5 / 3.0	1.5 / 3.0
Total Unit Amps	21.2	21.2	21.2	21.2	21.2	21.2	21.2	21.2	21.2
Min. Circuit Ampacity	25.4	25.4	25.4	25.4	25.4	25.4	25.4	25.4	25.4
Max. Overcurrent Protection	40 amps	40 amps	40 amps	40 amps	40 amps	40 amps	40 amps	40 amps	40 amps
Entrance Size Power Supply	1½"	1½"	1½"	1½"	1½"	1½"	1½"	1½"	1½"
Entrance Size Control Voltage	⅞"	⅞"	⅞"	⅞"	⅞"	⅞"	⅞"	⅞"	⅞"
Operating / Ship Weights (lbs)	460 / 481	459 / 482	465 / 488	459 / 486	464 / 486	465 / 492	459 / 491	469 / 491	467 / 496

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

SPECIFICATIONS — GPG1342

	GPG1342 070M41A*	GPG1342 070M41B*	GPG1342 070M41C*	GPG1342 090M41A*	GPG1342 090M41B*	GPG1342 090M41C*
COOLING CAPACITY						
Total BTU/h	40,500	40,500	40,500	40,500	40,500	40,500
Sensible BTU/h	30,800	30,800	30,800	30,800	30,800	30,800
SEER / EER	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0
Decibels	78	78	78	78	78	78
AHRI Reference #s	4385096	5360602	5495273	4385096	5360602	5495273
HEATING CAPACITY						
Input BTU/h	69,000	69,000	69,000	92,000	92,000	92,000
Output BTU/h	55,000	55,000	55,000	73,600	73,600	73,600
AFUE	80	80	80	80	80	80
Temperature Rise Range	35 - 65	35 - 65	35 - 65	45 - 75	45 - 75	45 - 75
No. of Burners	3	3	3	4	4	4
Orifice Size (Natural/Propane)	43 / 55	43 / 55	43 / 55	43 / 55	43 / 55	43 / 55
EVAPORATOR MOTOR						
Type	PSC	PSC	PSC	PSC	PSC	PSC
Wheel (D x W)	10" x 10"	10" x 10"	10" x 10"	10" x 10"	10" x 10"	10" x 10"
Indoor Nominal CFM	1,300	1,300	1,300	1,300	1,300	1,300
Motor Speed Tap (Cooling)	Medium	Medium	Medium	Medium	Medium	Medium
RPM/Amps (Cooling)	910/3.06	910/3.06	910/3.06	910/3.06	910/3.06	910/3.06
Horsepower	1/3	1/3	1/3	1/3	1/3	1/3
EVAPORATOR COIL						
Face Area (ft ²)	5.67	5.67	5.67	5.67	5.67	5.67
Rows Deep/Fins per Inch	4/14	4/14	4/14	4/14	4/14	4/14
Piston Size (Cooling)	0.072	0.072	0.072	0.072	0.072	0.072
Filter Size (ft ²)	4.7	4.7	4.7	4.7	4.7	4.7
Drain Size (NPT)	¾"	¾"	¾"	¾"	¾"	¾"
Refrigerant Charge (oz.)	105	81	81	105	81	81
CONDENSER FAN / COIL						
Horsepower - RPM	1/4 - 1100	1/4 - 1100	1/4 - 1100	1/4 - 1100	1/4 - 1100	1/4 - 1100
Diameter / # of Blades	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3
Outdoor Nominal CFM	3,500	3,500	3,500	3,500	3,500	3,500
Face Area (ft ²)	15.4	11.32	11.32	15.4	11.32	11.32
Rows Deep/Fins per Inch	1/24	1/27	1/27	1/24	1/27	1/27
COMPRESSOR						
Quantity / Type	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll
Stage	Single	Single	Single	Single	Single	Single
Compressor RLA/LRA	17.9 / 112	17.9 / 112	17.9 / 112	17.9 / 112	17.9 / 112	17.9 / 112
ELECTRICAL DATA						
Voltage-Phase-Frequency	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60
Indoor Blower FLA/LRA	3.0 / 4.1	3.0 / 4.1	3.0 / 4.1	3.0 / 4.1	3.0 / 4.1	3.0 / 4.1
Outdoor Fan FLA/LRA	1.4 / 2.9	1.4 / 2.9	1.4 / 2.9	1.4 / 2.9	1.4 / 2.9	1.4 / 2.9
Total Unit Amps	22.3	22.3	22.3	22.3	22.3	22.3
Min. Circuit Ampacity	26.8	26.8	26.8	26.8	26.8	26.8
Max. Overcurrent Protection	40 amps	40 amps	40 amps	40 amps	40 amps	40 amps
Entrance Size Power Supply	1½"	1½"	1½"	1½"	1½"	1½"
Entrance Size Control Voltage	⅞"	⅞"	⅞"	⅞"	⅞"	⅞"
Operating / Ship Weights (lbs)	493 / 515	462 / 485	469 / 492	496 / 520	462 / 488	471 / 494

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

SPECIFICATIONS — GPG1348

	GPG1348 070M41A*	GPG1348 070M41B*	GPG1348 070M41C*	GPG1348 070M41D*	GPG1348 090M41A	GPG1348 090M41B*
COOLING CAPACITY						
Total BTU/h	46,000	46,000	46,000	46,000	46,000	46,000
Sensible BTU/h	36,700	36,700	36,700	36,700	36,700	36,700
SEER / EER	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0
Decibels	80	80	80	80	80	80
AHRI Reference #s	4385097	5360603	5495274	5677932	4385097	5360603
HEATING CAPACITY						
Input BTU/h	69,000	69,000	69,000	69,000	92,000	92,000
Output BTU/h	55,000	55,000	55,000	55,000	73,600	73,600
AFUE	80	80	80	80	80	80
Temperature Rise Range	35 - 65	35 - 65	35 - 65	35 - 65	45 - 75	45 - 75
No. of Burners	3	3	3	3	4	4
Orifice Size (Natural/Propane)	43 / 55	43 / 55	43 / 55	43 / 55	43 / 55	43 / 55
EVAPORATOR MOTOR						
Type	EEM	EEM	EEM	EEM	EEM	EEM
Wheel (D x W)	11" x 10"	11" x 10"	11" x 10"	11" x 10"	11" x 10"	11" x 10"
Indoor Nominal CFM	1,550	1,550	1,550	1,550	1,550	1,550
Motor Speed Tap (Cooling)	T4	T4	T4	T4	T4	T4
RPM/Amps (Cooling)	1,050/5.8	1,050/5.8	1,050/5.8	1,050/5.8	1,050/5.8	1,050/5.8
Horsepower	3/4	3/4	3/4	3/4	3/4	3/4
EVAPORATOR COIL						
Face Area (ft ²)	5.67	5.67	5.67	5.67	5.67	5.67
Rows Deep/Fins per Inch	4/14	4/14	4/14	4/14	4/14	4/14
Piston Size (Cooling)	0.076	0.076	0.076	0.076	0.076	0.076
Filter Size (ft ²)	5.1	5.1	5.1	5.1	5.1	5.1
Drain Size (NPT)	¾"	¾"	¾"	¾"	¾"	¾"
Refrigerant Charge (oz.)	125	87	87	87	125	87
CONDENSER FAN / COIL						
Horsepower - RPM	1/4 - 1100	1/4 - 1100	1/4 - 1100	1/4 - 1100	1/4 - 1100	1/4 - 1100
Diameter / # of Blades	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3
Outdoor Nominal CFM	3,500	3,500	3,500	3,500	3,500	3,500
Face Area (ft ²)	15.4	8.8	8.8	8.8	15.4	8.8
Rows Deep/Fins per Inch	1/24	2/27	2/27	2/27	1/24	2/27
COMPRESSOR						
Quantity / Type	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll
Stage	Single	Single	Single	Single	Single	Single
Compressor RLA/LRA	19.9/109	19.9/109	19.9/109	19.9/109	19.9/109	19.9/109
ELECTRICAL DATA						
Voltage-Phase-Frequency	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60
Indoor Blower FLA/LRA	5.8	5.8	5.8	5.8	5.8	5.8
Outdoor Fan FLA/LRA	1.4/ 2.9	1.4/ 2.9	1.4/ 2.9	1.4/ 2.9	1.4/ 2.9	1.4/ 2.9
Total Unit Amps	27.1	27.1	27.1	27.1	27.1	27.1
Min. Circuit Ampacity	32.1	32.1	32.1	32.1	32.1	32.1
Max. Overcurrent Protection	50 amps	50 amps	50 amps	50 amps	50 amps	50 amps
Entrance Size Power Supply	1½"	1½"	1½"	1½"	1½"	1½"
Entrance Size Control Voltage	¾"	¾"	¾"	¾"	¾"	¾"
Operating / Ship Weights (lbs)	518 / 540	464 / 487	471 / 494	464 / 487	523 / 545	464 / 492

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

SPECIFICATIONS — GPG1348 (CONT.)

	GPG1348 090M41C*	GPG1348 090M41D*	GPG1348 115M41A	GPG1348 115M41B*	GPG1348 115M41C*	GPG1348 115M41D*
COOLING CAPACITY						
Total BTU/h	46,000	46,000	46,000	46,000	46,000	46,000
Sensible BTU/h	36,700	36,700	36,700	36,700	36,700	36,700
SEER / EER	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0	13.0 / 11.0
Decibels	80	80	80	80	80	80
AHRI Reference #s	5495274	5677932	4385097	5360603	5495274	5677932
HEATING CAPACITY						
Input BTU/h	92,000	92,000	115,000	115,000	115,000	115,000
Output BTU/h	73,600	73,600	92,000	92,000	92,000	92,000
AFUE	80	80	80	80	80	80
Temperature Rise Range	45 - 75	45 - 75	45 - 75	45 - 75	45 - 75	45 - 75
No. of Burners	4	4	5	5	5	5
Orifice Size (Natural/Propane)	43 / 55	43 / 55	43 / 55	43 / 55	43 / 55	43 / 55
EVAPORATOR MOTOR						
Type	EEM	EEM	EEM	EEM	EEM	EEM
Wheel (D x W)	11" x 10"	11" x 10"	11" x 10"	11" x 10"	11" x 10"	11" x 10"
Indoor Nominal CFM	1,550	1,550	1,550	1,550	1,550	1,550
Motor Speed Tap (Cooling)	T4	T4	T4	T4	T4	T4
RPM/Amps (Cooling)	1,050/5.8	1,050/5.8	1,050/5.8	1,050/5.8	1,050/5.8	1,050/5.8
Horsepower	3/4	3/4	3/4	3/4	3/4	3/4
EVAPORATOR COIL						
Face Area (ft ²)	5.67	5.67	5.67	5.67	5.67	5.67
Rows Deep/Fins per Inch	4/14	4/14	4/14	4/14	4/14	4/14
Piston Size (Cooling)	0.076	0.076	0.076	0.076	0.076	0.076
Filter Size (ft ²)	5.1	5.1	5.1	5.1	5.1	5.1
Drain Size (NPT)	¾"	¾"	¾"	¾"	¾"	¾"
Refrigerant Charge (oz.)	87	87	125	87	87	87
CONDENSER FAN / COIL						
Horsepower - RPM	1/4 - 1100	1/4 - 1100	1/4 - 1100	1/4 - 1100	1/4 - 1100	1/4 - 1100
Diameter / # of Blades	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3
Outdoor Nominal CFM	3,500	3,500	3,500	3,500	3,500	3,500
Face Area (ft ²)	8.8	8.8	15.4	8.8	8.8	8.8
Rows Deep/Fins per Inch	2/27	2/27	1/24	2/27	2/27	2/27
COMPRESSOR						
Quantity / Type	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll
Stage	Single	Single	Single	Single	Single	Single
Compressor RLA/LRA	19.9/109	19.9/109	19.9/109	19.9/109	19.9/109	19.9/109
ELECTRICAL DATA						
Voltage-Phase-Frequency	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60
Indoor Blower FLA/LRA	5.8	5.8	5.8	5.8	5.8	5.8
Outdoor Fan FLA/LRA	1.4/ 2.9	1.4/ 2.9	1.4/ 2.9	1.4/ 2.9	1.4/ 2.9	1.4/ 2.9
Total Unit Amps	27.1	27.1	27.1	27.1	27.1	27.1
Min. Circuit Ampacity	32.1	32.1	32.1	32.1	32.1	32.1
Max. Overcurrent Protection	50 amps	50 amps	50 amps	50 amps	50 amps	50 amps
Entrance Size Power Supply	1½"	1½"	1½"	1½"	1½"	1½"
Entrance Size Control Voltage	¾"	¾"	¾"	¾"	¾"	¾"
Operating / Ship Weights (lbs)	472 / 498	464 / 492	528 / 550	464 / 497	473 / 504	464 / 497

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

SPECIFICATIONS — GPG1360

	GPG1360 090M41A	GPG1360 090M41B*	GPG1360 090M41C*	GPG1360 090M41D*	GPG1360 115M41A	GPG1360 115M41B*
COOLING CAPACITY						
Total BTU/h	57,000	57,000	57,000	57,000	57,000	57,000
Sensible BTU/h	43,800	43,800	43,800	43,800	43,800	43,800
SEER / EER	13.0 / 10.75	13.0 / 10.75	13.0 / 10.75	13.0 / 10.75	13.0 / 10.75	13.0 / 10.75
Decibels	80	80	80	80	80	80
AHRI Reference #s	4385099	5360604	5495275	5677892	4385099	5360604
HEATING CAPACITY						
Input BTU/h	92,000	92,000	92,000	92,000	115,000	115,000
Output BTU/h	73,600	73,600	73,600	73,600	92,000	92,000
AFUE	80	80	80	80	80	80
Temperature Rise Range	45 - 75	45 - 75	45 - 75	45 - 75	45 - 75	45 - 75
No. of Burners	4	4	4	4	5	5
Orifice Size (Natural/Propane)	43 / 55	43 / 55	43 / 55	43 / 55	43 / 55	43 / 55
EVAPORATOR MOTOR						
Type	EEM	EEM	EEM	EEM	EEM	EEM
Wheel (D x W)	11" x 10"	11" x 10"	11" x 10"	11" x 10"	11" x 10"	11" x 10"
Indoor Nominal CFM	1,750	1,750	1,750	1,750	1,750	1,750
Motor Speed Tap (Cooling)	T4	T4	T4	T4	T4	T4
RPM/Amps (Cooling)	1,050/7.6	1,050/7.6	1,050/7.6	1,050/7.6	1,050/7.6	1,050/7.6
Horsepower	1.0	1.0	1.0	1.0	1.0	1.0
EVAPORATOR COIL						
Face Area (ft ²)	5.67	5.67	5.67	5.67	5.67	5.67
Rows Deep/Fins per Inch	4/14	4/14	4/14	4/14	4/14	4/14
Piston Size (Cooling)	0.087	0.086	0.087	0.086	0.087	0.086
Filter Size (ft ²)	6.3	6.3	6.3	6.3	6.3	6.3
Drain Size (NPT)	¾"	¾"	¾"	¾"	¾"	¾"
Refrigerant Charge (oz.)	185	91	91	91	185	91
CONDENSER FAN / COIL						
Horsepower - RPM	1/4 - 1100	1/4 - 1100	1/4 - 1100	1/4 - 1100	1/4 - 1100	1/4 - 1100
Diameter / # of Blades	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3
Outdoor Nominal CFM	3,500	3,500	3,500	3,500	3,500	3,500
Face Area (ft ²)	15.2	11.32	11.32	11.32	15.2	12.32
Rows Deep/Fins per Inch	2/16	2/27	2/27	2/27	2/16	2/28
COMPRESSOR						
Quantity / Type	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll
Stage	Single	Single	Single	Single	Single	Single
Compressor RLA/LRA	26.4 / 134	26.4 / 134	26.4 / 134	26.4 / 134	26.4 / 134	26.4 / 134
ELECTRICAL DATA						
Voltage-Phase-Frequency	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60
Indoor Blower FLA/LRA	7.6	7.6	7.6	7.6	7.6	7.6
Outdoor Fan FLA/LRA	1.4/ 2.9	1.4/ 2.9	1.4/ 2.9	1.4/ 2.9	1.4/ 2.9	1.4/ 2.9
Total Unit Amps	35.4	35.4	35.4	35.4	35.4	35.4
Min. Circuit Ampacity	42	42	42	42	42	42
Max. Overcurrent Protection	60 amps	60 amps	60 amps	60 amps	60 amps	60 amps
Entrance Size Power Supply	1½"	1½"	1½"	1½"	1½"	1½"
Entrance Size Control Voltage	¾"	¾"	¾"	¾"	¾"	¾"
Operating / Ship Weights (lbs)	533 / 555	466 / 495	472 / 502	466 / 495	538 / 560	466 / 500

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

SPECIFICATIONS — GPG1360 (CONT.)

	GPG1360 115M41C*	GPG1360 115M41D*	GPG1360 140M41A	GPG1360 140M41B*	GPG1360 140M41C*	GPG1360 140M41D*
COOLING CAPACITY						
Total BTU/h	57,000	57,000	57,000	57,000	57,000	57,000
Sensible BTU/h	43,800	43,800	43,800	43,800	43,800	43,800
SEER / EER	13.0 / 10.75	13.0 / 10.75	13.0 / 10.75	13.0 / 10.75	13.0 / 10.75	13.0 / 10.75
Decibels	80	80	80	80	80	80
AHRI Reference #s	5495275	5677892	4385099	5360604	5495275	5677892
HEATING CAPACITY						
Input BTU/h	115,000	115,000	138,000	138,000	138,000	138,000
Output BTU/h	92,000	92,000	110,400	110,400	110,400	110,400
AFUE	80	80	80	80	80	80
Temperature Rise Range	45 - 75	45 - 75	45 - 75	45 - 75	45 - 75	45 - 75
No. of Burners	5	5	6	6	6	6
Orifice Size (Natural/Propane)	43 / 55	43 / 55	43 / 55	43 / 55	43 / 55	43 / 55
EVAPORATOR MOTOR						
Type	EEM	EEM	EEM	EEM	EEM	EEM
Wheel (D x W)	11" x 10"	11" x 10"	11" x 10"	11" x 10"	11" x 10"	11" x 10"
Indoor Nominal CFM	1,750	1,750	1,750	1,750	1,750	1,750
Motor Speed Tap (Cooling)	T4	T4	T4	T4	T4	T4
RPM/Amps (Cooling)	1,050/7.6	1,050/7.6	1,050/7.6	1,050/7.6	1,050/7.6	1,050/7.6
Horsepower	1.0	1.0	1.0	1.0	1.0	1.0
EVAPORATOR COIL						
Face Area (ft ²)	5.67	5.67	5.67	5.67	5.67	5.67
Rows Deep/Fins per Inch	4/14	4/14	4/14	4/14	4/14	4/14
Piston Size (Cooling)	0.087	0.086	0.087	0.086	0.087	0.086
Filter Size (ft ²)	6.3	6.3	6.3	6.3	6.3	6.3
Drain Size (NPT)	¾"	¾"	¾"	¾"	¾"	¾"
Refrigerant Charge (oz.)	91	91	185	91	91	91
CONDENSER FAN / COIL						
Horsepower - RPM	1/4 - 1100	1/4 - 1100	1/4 - 1100	1/4 - 1100	1/4 - 1100	1/4 - 1100
Diameter / # of Blades	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3
Outdoor Nominal CFM	3,500	3,500	3,500	3,500	3,500	3,500
Face Area (ft ²)	12.32	12.32	15.2	13.32	13.32	13.32
Rows Deep/Fins per Inch	2/28	2/28	2/16	2/29	2/29	2/29
COMPRESSOR						
Quantity / Type	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll
Stage	Single	Single	Single	Single	Single	Single
Compressor RLA/LRA	26.4 / 134	26.4 / 134	26.4 / 134	26.4 / 134	26.4 / 134	26.4 / 134
ELECTRICAL DATA						
Voltage-Phase-Frequency	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60
Indoor Blower FLA/LRA	7.6	7.6	7.6	7.6	7.6	7.6
Outdoor Fan FLA/LRA	1.4/ 2.9	1.4/ 2.9	1.4/ 2.9	1.4/ 2.9	1.4/ 2.9	1.4/ 2.9
Total Unit Amps	35.4	35.4	35.4	35.4	35.4	35.4
Min. Circuit Ampacity	42	42	42	42	42	42
Max. Overcurrent Protection	60 amps	60 amps	60 amps	60 amps	60 amps	60 amps
Entrance Size Power Supply	1½"	1½"	1½"	1½"	1½"	1½"
Entrance Size Control Voltage	⅞"	⅞"	⅞"	⅞"	⅞"	⅞"
Operating / Ship Weights (lbs)	474 / 505	466 / 500	543 / 565	466 / 505	476 / 510	466 / 505

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

EXPANDED COOLING DATA — GP61330***M41

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																									
		65					75					85				95				105				115			
		ENTERING INDOOR WET BULB TEMPERATURE																									
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1125	MBh	28.0	29.0	31.8	-	27.4	28.4	31.1	-	26.7	27.7	30.3	-	26.1	27.0	29.6	-	24.8	25.7	28.1	-	22.9	23.8	26.1	-	
		S/T	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.9	0.7	0.5	-	0.9	0.8	0.5	-	0.9	0.8	0.5	-	
		ΔT	18	16	12	-	18	16	12	-	18	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	
		kW	2.1	2.1	2.2	-	2.2	2.3	2.4	-	2.4	2.4	2.5	-	2.5	2.5	2.6	-	2.6	2.6	2.7	-	2.7	2.7	2.8	-	
		Amps	7.7	7.9	8.1	-	8.3	8.5	8.7	-	8.9	9.1	9.4	-	9.5	9.7	10.0	-	10.1	10.3	10.7	-	10.7	10.9	11.3	-	
	1000	Hi Pr	238	256	271	-	267	288	304	-	304	327	345	-	346	373	393	-	390	419	443	-	430	463	489	-	
		Lo Pr	114	122	133	-	121	129	140	-	126	134	146	-	132	140	153	-	138	147	161	-	143	152	166	-	
		MBh	27.2	28.2	30.9	-	26.6	27.5	30.2	-	25.9	26.9	29.5	-	25.3	26.2	28.7	-	24.0	24.9	27.3	-	22.3	23.1	25.3	-	
		S/T	0.8	0.6	0.4	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.9	0.7	0.5	-	0.9	0.7	0.5	-	
		ΔT	19	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-	19	16	13	-	18	15	12	-	
	875	kW	2.1	2.1	2.2	-	2.2	2.3	2.3	-	2.4	2.4	2.5	-	2.5	2.5	2.6	-	2.6	2.6	2.7	-	2.7	2.7	2.8	-	
		Amps	7.6	7.8	8.0	-	8.2	8.4	8.6	-	8.9	9.1	9.4	-	9.4	9.7	10.0	-	10.0	10.2	10.6	-	10.6	10.8	11.2	-	
		Hi Pr	236	254	268	-	265	285	301	-	301	324	342	-	343	369	390	-	386	415	438	-	426	459	484	-	
		Lo Pr	113	120	131	-	120	127	139	-	124	132	144	-	131	139	152	-	137	146	159	-	142	151	164	-	
		MBh	25.1	26.0	28.5	-	24.5	25.4	27.9	-	23.9	24.8	27.2	-	23.4	24.2	26.5	-	22.2	23.0	25.2	-	20.6	21.3	23.3	-	
75	S/T	0.7	0.6	0.4	-	0.8	0.6	0.4	-	0.8	0.6	0.4	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-		
	ΔT	19	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	17	13	-	18	16	12	-		
	kW	2.0	2.1	2.1	-	2.2	2.2	2.3	-	2.3	2.3	2.4	-	2.4	2.5	2.5	-	2.5	2.6	2.6	-	2.6	2.6	2.7	-		
	Amps	7.4	7.6	7.8	-	8.0	8.2	8.4	-	8.6	8.8	9.1	-	9.2	9.4	9.7	-	9.7	10.0	10.3	-	10.3	10.5	10.9	-		
	Hi Pr	229	246	260	-	257	276	292	-	292	314	332	-	333	358	378	-	374	403	425	-	413	445	470	-		
Lo Pr	110	117	128	-	116	123	135	-	121	128	140	-	127	135	147	-	133	141	154	-	137	146	159	-			
75	1125	MBh	28.5	29.3	31.8	34.1	27.8	28.7	31.0	33.3	27.2	28.0	30.3	32.5	26.5	27.3	29.5	31.7	25.2	25.9	28.1	30.1	23.3	24.0	26.0	27.9	
		S/T	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.9	0.7	0.4	1.0	0.9	0.7	0.5	
		ΔT	21	19	16	11	21	20	16	11	21	20	16	11	21	20	16	11	21	19	16	11	19	18	15	10	
		kW	2.1	2.1	2.2	2.3	2.3	2.3	2.4	2.4	2.4	2.4	2.5	2.6	2.5	2.6	2.6	2.7	2.6	2.7	2.7	2.8	2.7	2.8	2.8	2.9	
		Amps	7.8	7.9	8.2	8.5	8.3	8.5	8.8	9.1	9.0	9.2	9.5	9.9	9.6	9.8	10.1	10.5	10.2	10.4	10.8	11.2	10.8	11.0	11.4	11.8	
	1000	Hi Pr	241	259	273	285	270	291	307	320	307	330	349	364	350	376	397	415	393	423	447	466	435	468	494	515	
		Lo Pr	116	123	134	143	122	130	142	151	127	135	147	157	133	142	155	165	140	149	162	173	144	154	168	179	
		MBh	27.7	28.5	30.8	33.1	27.0	27.8	30.1	32.3	26.4	27.2	29.4	31.6	25.7	26.5	28.7	30.8	24.5	25.2	27.3	29.2	22.7	23.3	25.2	27.1	
		S/T	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.9	0.7	0.4	1.0	0.9	0.7	0.4	
		ΔT	22	20	17	11	22	20	17	12	22	20	17	12	22	21	17	12	22	20	17	11	21	19	16	11	
	875	kW	2.1	2.1	2.2	2.3	2.2	2.3	2.4	2.4	2.4	2.4	2.5	2.6	2.5	2.6	2.6	2.7	2.6	2.6	2.7	2.8	2.7	2.7	2.8	2.9	
		Amps	7.7	7.9	8.1	8.4	8.3	8.5	8.7	9.0	8.9	9.1	9.4	9.8	9.5	9.7	10.1	10.4	10.1	10.3	10.7	11.1	10.7	10.9	11.3	11.7	
		Hi Pr	238	256	271	282	267	288	304	317	304	327	346	360	346	373	394	410	390	419	443	462	430	463	489	510	
		Lo Pr	114	122	133	141	121	129	140	149	126	134	146	155	132	140	153	163	138	147	161	171	143	152	166	177	
		MBh	25.5	26.3	28.5	30.5	24.9	25.7	27.8	29.8	24.4	25.1	27.1	29.1	23.8	24.5	26.5	28.4	22.6	23.2	25.2	27.0	20.9	21.5	23.3	25.0	
75	S/T	0.8	0.7	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	1.0	0.9	0.6	0.4		
	ΔT	22	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	22	21	17	12	21	19	16	11		
	kW	2.0	2.1	2.1	2.2	2.2	2.2	2.3	2.4	2.3	2.4	2.4	2.5	2.4	2.5	2.6	2.6	2.5	2.6	2.7	2.7	2.6	2.7	2.7	2.8		
	Amps	7.5	7.7	7.9	8.2	8.1	8.2	8.5	8.8	8.7	8.9	9.2	9.5	9.3	9.5	9.8	10.1	9.8	10.1	10.4	10.8	10.4	10.6	11.0	11.4		
	Hi Pr	231	249	263	274	259	279	295	307	295	317	335	350	336	361	382	398	378	407	429	448	418	449	474	495		
Lo Pr	111	118	129	137	117	125	136	145	122	130	141	151	128	136	149	158	134	143	156	166	139	148	161	172			

Shaded area reflects ACCA (TVA) conditions. IDB: Entering Indoor Dry Bulb Temperature. High and low pressures are measured at the liquid and suction access fittings. kW = Total system power. Amps: Unit amps (comp.+ evaporator + condenser fan motors)

EXPANDED COOLING DATA — GP61336***M41

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65				75				85				95				105				115					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1350	MBh	35.1	36.4	39.8	-	34.3	35.5	38.9	-	33.4	34.7	38.0	-	32.6	33.8	37.1	-	31.0	32.1	35.2	-	28.7	29.8	32.6	-	
		S/T	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.9	0.7	0.5	-	0.9	0.7	0.5	-	0.9	0.7	0.5	-	
		ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	15	12	-	
		kW	2.6	2.6	2.7	-	2.8	2.8	2.9	-	2.9	3.0	3.1	-	3.1	3.1	3.2	-	3.2	3.3	3.4	-	3.3	3.4	3.5	-	
		Amps	11.1	11.3	11.6	-	11.8	12.1	12.4	-	12.7	12.9	13.3	-	13.4	13.7	14.1	-	14.1	14.4	14.9	-	14.9	15.2	15.6	-	
		Hi Pr	249	268	283	-	280	301	318	-	318	343	362	-	363	390	412	-	408	439	463	-	451	485	512	-	
	Lo Pr	111	119	129	-	118	125	137	-	122	130	142	-	129	137	149	-	135	143	156	-	139	148	162	-		
	1200	MBh	34.1	35.3	38.7	-	33.3	34.5	37.8	-	32.5	33.7	36.9	-	31.7	32.8	36.0	-	30.1	31.2	34.2	-	27.9	28.9	31.7	-	
		S/T	0.7	0.6	0.4	-	0.8	0.6	0.4	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.9	0.7	0.5	-	
		ΔT	19	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-	
		kW	2.6	2.6	2.7	-	2.7	2.8	2.9	-	2.9	3.0	3.1	-	3.0	3.1	3.2	-	3.2	3.2	3.3	-	3.3	3.4	3.5	-	
		Amps	11.0	11.2	11.5	-	11.7	12.0	12.3	-	12.6	12.8	13.2	-	13.3	13.6	14.0	-	14.0	14.3	14.7	-	14.8	15.1	15.5	-	
Hi Pr		247	266	281	-	277	298	315	-	315	339	358	-	359	386	408	-	404	435	459	-	446	480	507	-		
Lo Pr	110	117	128	-	117	124	135	-	121	129	141	-	127	135	148	-	133	142	155	-	138	147	160	-			
1050	MBh	31.4	32.6	35.7	-	30.7	31.8	34.9	-	30.0	31.1	34.0	-	29.2	30.3	33.2	-	27.8	28.8	31.5	-	25.7	26.7	29.2	-		
	S/T	0.7	0.6	0.4	-	0.7	0.6	0.4	-	0.8	0.6	0.4	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-		
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	16	12	-		
	kW	2.5	2.5	2.6	-	2.7	2.7	2.8	-	2.8	2.9	3.0	-	3.0	3.0	3.1	-	3.1	3.2	3.3	-	3.2	3.3	3.4	-		
	Amps	10.8	11.0	11.3	-	11.5	11.7	12.0	-	12.3	12.5	12.9	-	13.0	13.3	13.6	-	13.7	14.0	14.4	-	14.4	14.7	15.1	-		
	Hi Pr	240	258	272	-	269	289	305	-	306	329	347	-	348	375	396	-	392	422	445	-	433	466	492	-		
Lo Pr	107	114	124	-	113	120	131	-	118	125	136	-	123	131	143	-	129	138	150	-	134	142	155	-			
75	1350	MBh	35.7	36.7	39.8	42.7	34.8	35.9	38.8	41.7	34.0	35.0	37.9	40.7	33.2	34.2	37.0	39.7	31.5	32.5	35.1	37.7	29.2	30.1	32.5	34.9	
		S/T	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	1.0	0.9	0.7	0.4	1.0	0.9	0.7	0.4	
		ΔT	22	20	16	11	22	20	16	11	22	20	16	11	22	20	17	11	22	21	20	16	11	20	19	15	11
		kW	2.6	2.6	2.7	2.8	2.8	2.8	2.9	3.0	3.0	3.0	3.0	3.1	3.2	3.1	3.2	3.3	3.4	3.2	3.3	3.4	3.5	3.3	3.4	3.5	3.6
		Amps	11.2	11.4	11.7	12.1	11.9	12.2	12.5	12.9	12.9	12.8	13.0	13.4	13.8	13.5	13.8	14.2	14.7	14.3	14.6	15.0	15.5	15.0	15.3	15.8	16.3
		Hi Pr	252	271	286	299	283	304	321	335	322	346	365	381	366	366	394	416	434	412	443	468	488	455	490	517	540
	Lo Pr	113	120	131	139	119	127	138	147	124	131	144	153	130	138	151	161	161	136	145	158	168	141	150	163	174	
	1200	MBh	34.6	35.7	38.6	41.4	33.8	34.8	37.7	40.5	33.0	34.0	36.8	39.5	32.2	33.2	35.9	38.5	30.6	31.5	34.1	36.6	28.4	29.2	31.6	33.9	
		S/T	0.8	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	1.0	0.9	0.7	0.4	1.0	0.9	0.7	0.4	
		ΔT	22	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	19	16	11	
		kW	2.6	2.6	2.7	2.8	2.8	2.8	2.9	3.0	3.0	2.9	3.0	3.1	3.2	3.1	3.2	3.3	3.4	3.2	3.3	3.4	3.5	3.3	3.4	3.5	3.6
		Amps	11.1	11.3	11.6	12.0	11.8	12.1	12.4	12.8	12.7	12.9	13.3	13.7	13.4	13.4	14.1	14.5	14.9	14.2	14.5	14.9	15.4	14.9	15.2	15.6	16.2
Hi Pr		249	268	283	296	280	301	318	332	318	343	362	377	363	363	390	412	430	408	439	464	483	451	485	512	534	
Lo Pr	111	119	129	138	118	125	137	146	122	130	142	151	129	137	149	159	159	135	143	156	167	139	148	162	172		
1050	MBh	32.0	32.9	35.6	38.2	31.2	32.2	34.8	37.3	30.5	31.4	34.0	36.5	29.7	30.6	33.1	35.6	28.3	29.1	31.5	33.8	26.2	26.9	29.2	31.3		
	S/T	0.8	0.7	0.6	0.4	0.8	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4		
	ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	18	12	23	21	17	12	21	20	16	11		
	kW	2.5	2.6	2.6	2.7	2.7	2.8	2.8	2.9	2.9	2.9	2.9	3.0	3.1	3.0	3.1	3.2	3.3	3.1	3.2	3.3	3.4	3.2	3.3	3.4	3.5	
	Amps	10.8	11.1	11.4	11.7	11.6	11.8	12.1	12.5	12.4	12.6	13.0	13.4	13.1	13.1	13.4	13.8	14.2	13.8	14.1	14.5	15.0	14.5	14.8	15.3	15.8	
	Hi Pr	242	260	275	287	272	292	309	322	309	332	351	366	352	378	400	417	396	426	450	469	469	437	470	497	518	
Lo Pr	108	115	126	134	114	122	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167			

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 Shaded area reflects ACCA (TVA) conditions.
 Amps: Unit amps (comp.+ evaporator + condenser fan motors)
 kW = Total system power

EXPANDED COOLING DATA — GPG1342***M41

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																							
		65				75				85				95				105				115			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	1440	MBh	39.7	41.1	45.1	-	37.8	39.2	43.0	-	36.9	38.3	41.9	-	35.1	36.4	39.8	-	32.5	33.7	36.9	-			
		S/T	0.8	0.6	0.4	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.9	0.7	0.5	-	0.9	0.7	0.5	-			
		ΔT	19	17	13	-	20	17	13	-	20	17	13	-	19	17	13	-	18	16	12	-			
		kW	2.9	3.0	3.1	-	3.1	3.2	3.3	-	3.3	3.4	3.5	-	3.5	3.5	3.7	-	3.6	3.7	3.8	-			
		Amps	12.6	12.9	13.2	-	13.5	13.7	14.1	-	14.4	14.7	15.1	-	15.3	15.6	16.0	-	16.1	16.5	16.9	-			
		Hi Pr	237	255	269	-	266	286	302	-	302	325	343	-	344	370	391	-	387	417	440	-			
	Lo Pr	113	120	131	-	119	127	138	-	124	132	144	-	130	138	151	-	136	145	158	-				
	1280	MBh	38.5	39.9	43.8	-	36.7	38.1	41.7	-	35.8	37.1	40.7	-	34.1	35.3	38.7	-	31.5	32.7	35.8	-			
		S/T	0.7	0.6	0.4	-	0.8	0.6	0.4	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-			
		ΔT	20	17	13	-	20	18	13	-	21	18	14	-	21	18	13	-	19	16	12	-			
		kW	2.9	3.0	3.0	-	3.1	3.2	3.3	-	3.3	3.4	3.5	-	3.4	3.5	3.6	-	3.6	3.7	3.8	-			
		Amps	12.5	12.8	13.1	-	13.4	13.6	14.0	-	14.3	14.6	15.0	-	15.2	15.5	15.9	-	16.0	16.3	16.8	-			
Hi Pr		234	252	266	-	263	283	299	-	299	322	340	-	341	367	387	-	383	413	436	-				
Lo Pr	112	119	130	-	118	125	137	-	122	130	142	-	129	137	149	-	135	143	157	-					
1125	MBh	35.6	36.9	40.4	-	34.7	36.0	39.4	-	33.9	35.1	38.5	-	33.1	34.3	37.6	-	31.4	32.6	35.7	-				
	S/T	0.7	0.6	0.4	-	0.7	0.6	0.4	-	0.7	0.6	0.4	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-				
	ΔT	20	18	13	-	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-				
	kW	2.8	2.9	3.0	-	3.0	3.1	3.2	-	3.2	3.3	3.4	-	3.4	3.4	3.5	-	3.5	3.6	3.7	-				
	Amps	12.3	12.5	12.8	-	13.1	13.3	13.7	-	14.0	14.3	14.7	-	14.8	15.1	15.5	-	15.6	15.9	16.4	-				
	Hi Pr	227	245	258	-	255	275	290	-	290	312	330	-	331	356	376	-	372	400	423	-				
Lo Pr	108	115	126	-	114	122	133	-	119	126	138	-	125	133	145	-	131	139	152	-					
75	1440	MBh	40.4	41.6	45.0	48.3	39.4	40.6	43.9	47.2	38.5	39.6	42.9	46.0	37.5	38.7	41.8	44.9	35.7	36.7	39.7	42.7			
		S/T	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	1.0	0.9	0.7	0.4			
		ΔT	22	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12			
		kW	3.0	3.0	3.1	3.2	3.2	3.2	3.3	3.4	3.5	3.3	3.4	3.5	3.6	3.5	3.6	3.7	3.8	3.6	3.7	3.8	3.9		
		Amps	12.7	13.0	13.3	13.7	13.6	13.8	14.2	14.7	14.6	14.9	15.3	15.8	15.4	15.7	16.2	16.7	16.2	16.2	16.6	17.1	17.6		
		Hi Pr	239	257	272	283	268	289	305	318	318	305	328	347	362	348	374	395	412	391	421	444	464		
	Lo Pr	114	121	132	141	120	128	140	149	149	125	133	145	155	131	140	152	162	138	146	160	170			
	1280	MBh	39.2	40.3	43.7	46.9	38.3	39.4	42.7	45.8	37.4	38.5	41.6	44.7	36.5	37.5	40.6	43.6	34.6	35.7	38.6	41.4			
		S/T	0.8	0.7	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4			
		ΔT	23	21	18	12	24	22	18	12	24	22	18	12	24	22	18	12	23	22	18	12			
		kW	2.9	3.0	3.1	3.2	3.1	3.2	3.3	3.4	3.5	3.3	3.4	3.5	3.6	3.5	3.6	3.7	3.8	3.6	3.7	3.8	3.9		
		Amps	12.6	12.9	13.2	13.6	13.5	13.7	14.1	14.6	14.4	14.7	15.2	15.6	15.3	15.6	16.0	16.6	16.1	16.1	16.5	16.9	17.5		
Hi Pr		237	255	269	281	266	286	302	315	315	302	325	343	358	344	370	391	408	387	417	440	459			
Lo Pr	113	120	131	139	119	127	138	147	147	124	132	144	153	130	138	151	161	136	145	158	168				
1125	MBh	36.2	37.2	40.3	43.3	35.3	36.4	39.4	42.3	34.5	35.5	38.4	41.2	33.6	34.6	37.5	40.2	32.0	32.9	35.6	38.2				
	S/T	0.8	0.7	0.5	0.3	0.8	0.7	0.6	0.4	0.8	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4				
	ΔT	24	22	18	12	24	22	18	12	24	22	18	12	24	22	18	12	24	22	18	12				
	kW	2.9	2.9	3.0	3.1	3.1	3.1	3.2	3.3	3.4	3.2	3.3	3.4	3.5	3.4	3.5	3.6	3.7	3.5	3.6	3.7	3.8			
	Amps	12.3	12.6	12.9	13.3	13.2	13.4	13.8	14.2	14.1	14.4	14.8	15.3	14.9	15.2	15.7	16.2	15.7	15.7	16.1	16.5	17.1			
	Hi Pr	230	247	261	272	258	277	293	306	306	293	315	333	347	334	359	379	396	376	404	427	445			
Lo Pr	109	116	127	135	115	123	134	143	143	120	128	139	148	126	134	146	156	132	141	153	163				

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 Shaded area reflects ACCA (TVA) conditions.
 Amps: Unit amps (comp.+ evaporator + condenser fan motors)
 kW = Total system power

EXPANDED COOLING DATA — GP61348***M41

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE												
		65				75				85				95				105				115				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	1700	MBh	45.4	47.0	51.5	-	44.3	45.9	50.3	-	43.3	44.9	49.1	-	42.2	43.8	47.9	-	40.1	41.6	45.5	-	37.2	38.5	42.2	-
		S/T	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.9	0.7	0.5	-	0.9	0.7	0.5	-	0.9	0.7	0.5	-
		ΔT	19	17	13	-	19	17	13	-	19	17	13	-	20	17	13	-	19	17	13	-	18	16	12	-
		kW	3.3	3.3	3.4	-	3.5	3.6	3.7	-	3.7	3.8	3.9	-	3.9	4.0	4.1	-	4.0	4.1	4.3	-	4.2	4.3	4.4	-
	1520	Amps	15.9	16.2	16.6	-	16.9	17.2	17.6	-	17.9	18.3	18.7	-	18.9	19.2	19.7	-	19.8	20.2	20.7	-	20.7	21.1	21.7	-
		Hi Pr	241	259	274	-	270	291	307	-	308	331	349	-	350	377	398	-	394	424	448	-	435	468	495	-
		Lo Pr	115	123	134	-	122	129	141	-	126	135	147	-	133	141	154	-	139	148	162	-	144	153	167	-
		MBh	44.7	46.3	50.8	-	43.7	45.3	49.6	-	42.6	44.2	48.4	-	41.6	43.1	47.2	-	39.5	41.0	44.9	-	36.6	37.9	41.6	-
	1330	S/T	0.7	0.6	0.4	-	0.8	0.6	0.4	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.9	0.7	0.5	-	0.9	0.7	0.5	-
		ΔT	20	17	13	-	20	18	13	-	20	18	13	-	21	18	14	-	20	18	13	-	19	16	12	-
		kW	3.2	3.3	3.4	-	3.5	3.6	3.7	-	3.7	3.8	3.9	-	3.9	3.9	4.1	-	4.0	4.1	4.2	-	4.2	4.2	4.4	-
		Amps	15.5	15.8	16.2	-	16.4	16.7	17.1	-	17.5	17.8	18.3	-	18.4	18.7	19.2	-	19.3	19.7	20.2	-	20.2	20.6	21.1	-
75	1700	MBh	46.2	47.5	51.4	55.2	45.1	46.4	50.2	53.9	44.0	45.3	49.0	52.6	42.9	44.2	47.8	51.4	40.8	42.0	45.5	48.8	37.8	38.9	42.1	45.2
		S/T	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	1.0	0.9	0.7	0.4	1.0	0.9	0.7	0.4
		ΔT	22	20	17	12	22	21	17	12	22	21	17	12	23	21	17	12	24	22	18	12	22	20	17	11
		kW	3.3	3.4	3.5	3.6	3.5	3.6	3.7	3.8	3.8	3.7	3.8	3.9	4.1	3.9	4.0	4.1	4.3	4.1	4.2	4.3	4.4	4.2	4.3	4.4
	1520	Amps	16.0	16.3	16.7	17.2	17.0	17.3	17.7	18.2	18.1	18.4	18.9	19.4	19.0	19.4	19.9	20.5	20.0	20.3	20.9	21.5	20.9	21.3	21.9	22.6
		Hi Pr	243	262	277	289	273	294	310	324	311	334	353	368	354	381	402	419	398	428	452	472	440	473	500	521
		Lo Pr	116	124	135	144	123	131	143	152	128	136	148	158	134	143	156	166	141	150	163	174	145	155	169	180
		MBh	45.5	46.8	50.7	54.4	44.4	45.7	49.5	53.1	43.4	44.6	48.3	51.9	42.3	43.6	47.1	50.6	40.2	41.4	44.8	48.1	37.2	38.3	41.5	44.5
	1330	S/T	0.8	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	1.0	0.9	0.7	0.4	1.0	0.9	0.7	0.4
		ΔT	23	22	18	12	24	22	18	12	24	22	18	12	24	22	18	12	24	22	18	12	22	20	17	11
		kW	3.3	3.3	3.4	3.5	3.5	3.6	3.7	3.8	3.7	3.8	3.9	4.0	3.9	4.0	4.1	4.2	4.1	4.1	4.3	4.4	4.2	4.3	4.4	4.5
		Amps	16.0	16.2	16.6	17.1	16.9	17.2	17.6	18.1	18.0	18.3	18.8	19.3	18.9	19.3	19.8	20.4	19.9	20.2	20.8	21.4	20.8	21.2	21.8	22.4
1700	Hi Pr	242	260	275	287	271	292	308	321	308	332	351	366	351	378	399	416	395	425	449	468	437	470	496	518	
	Lo Pr	116	123	134	143	122	130	142	151	127	135	147	157	133	142	155	165	140	149	162	173	144	154	168	179	
	MBh	42.0	43.2	46.8	50.2	41.0	42.2	45.7	49.0	40.0	41.2	44.6	47.9	39.0	40.2	43.5	46.7	37.1	38.2	41.3	44.4	34.4	35.4	38.3	41.1	
	S/T	0.8	0.7	0.6	0.4	0.8	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	
1520	ΔT	24	22	18	12	24	22	18	13	24	22	18	13	24	22	18	13	24	22	18	12	22	21	17	12	
	kW	3.2	3.3	3.4	3.5	3.4	3.5	3.6	3.7	3.6	3.7	3.8	3.9	3.8	3.9	4.0	4.1	4.0	4.0	4.2	4.3	4.1	4.2	4.3	4.4	
	Amps	15.6	15.9	16.3	16.7	16.6	16.8	17.3	17.7	17.6	17.9	18.4	18.9	18.5	18.9	19.4	19.9	19.4	19.8	20.3	20.9	20.3	20.7	21.3	21.9	
	Hi Pr	234	252	266	278	263	283	299	312	299	322	340	355	341	367	387	404	383	413	436	454	424	456	481	502	
1700	Lo Pr	112	119	130	139	118	126	138	146	123	131	143	152	129	138	150	160	135	144	157	168	140	149	163	173	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 Shaded area reflects ACCA (TVA) conditions.
 Amps: Unit amps (comp.+ evaporator + condenser fan motors)
 kW = Total system power

EXPANDED COOLING DATA — GP61360***M41 (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE															IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																																														
		65					75					85							95					105					115																																				
		59	63	67	71	75	59	63	67	71	75	59	63	67	71	75			59	63	67	71	75	59	63	67	71	75	59	63	67	71	75																																
80	2035	58.3	1.0	0.9	0.7	0.5	57.0	58.2	62.2	66.5	55.6	56.8	60.7	64.9	54.3	55.4	59.2	63.3	51.5	52.7	56.3	60.1	47.7	48.8	52.1	55.7	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75														
80	1810	246	265	280	292	276	297	314	327	314	338	357	372	358	385	407	424	403	433	458	477	445	479	506	527	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75					
80	1590	236	255	269	280	265	286	302	315	302	325	343	358	344	370	391	407	387	416	439	458	427	460	486	506	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75
85	2035	59.3	60.5	63.3	67.6	58.0	59.1	61.9	66.0	56.6	57.7	60.4	64.4	55.2	56.3	58.9	62.9	52.4	53.5	56.0	59.7	48.6	49.5	51.9	55.3	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75					
85	1810	249	268	283	295	279	300	317	331	317	342	361	376	361	389	411	428	407	438	462	482	449	484	511	533	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75					
85	1590	239	257	271	283	268	288	305	318	305	328	346	361	347	374	395	411	391	420	444	463	432	464	490	511	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75					

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction access fittings.
Shaded area reflects AHRH (TVA) conditions.
Amps: Unit amps (comp.+ evaporator + condenser fan motors)
kW = Total system power

AIRFLOW DATA FOR PSC MOTORS

GPG13M— 2-TON MODELS

SPEED	HIGH		MED		LOW	
	CFM	WATTS	CFM	WATTS	CFM	WATTS
0.1	1,190	380	850	230	600	150
0.2	1,140	360	830	220	570	140
0.3	1,080	350	765	215	510	130
0.4	1,025	340	715	210	450	125
0.5	975	330	660	205	380	120
0.6	920	310	610	195	---	---
0.7	830	300	---	---	---	---
0.8	730	290	---	---	---	---

GPG13M— 2½-TON MODELS

SPEED	HIGH		MED		LOW	
	CFM	WATTS	CFM	WATTS	CFM	WATTS
0.1	1,370	509	1,261	452	1,056	350
0.2	1,310	492	1,221	442	1,010	339
0.3	1,262	489	1,174	428	971	343
0.4	1,208	475	1,125	414	937	329
0.5	1,140	453	1,063	398	878	318
0.6	1,081	440	1,004	380	811	306
0.7	1,006	425	919	368	723	291
0.8	879	403	796	371	545	259

GPG13M— 3-TON MODELS

SPEED	HIGH		MED		LOW	
	CFM	WATTS	CFM	WATTS	CFM	WATTS
0.1	1,462	596	1,337	471	1,029	346
0.2	1,398	563	1,265	452	982	334
0.3	1,326	550	1,227	448	946	329
0.4	1,260	534	1,159	429	888	313
0.5	1,188	513	1,073	405	823	304
0.6	1,090	496	1,008	393	750	287
0.7	997	478	895	371	668	271
0.8	852	454	760	346	454	238

GPG13M— 3½-TON MODELS

SPEED	HIGH		MED		LOW	
	CFM	WATTS	CFM	WATTS	CFM	WATTS
0.1	1,575	585	1,450	480	1,100	340
0.2	1,515	565	1,390	460	1,040	325
0.3	1,430	550	1,300	445	1,000	320
0.4	1,340	525	1,215	425	925	305
0.5	1,240	505	1,115	395	860	290
0.6	1,130	465	1,030	375	800	275
0.7	1,010	450	945	350	690	255
0.8	910	430	860	335	---	---

AIRFLOW DATA FOR EEM MOTORS

GPG13M– 4-TON A*/B* MODELS

SPEED E.S.P	T1 (HEATING)		T2 (HEATING)		T3 (HEATING)		T4 (COOLING)		T5 (COOLING)	
	CFM	WATTS	CFM	WATTS	CFM	WATTS	CFM	WATTS	CFM	WATTS
0.1	---	---	---	---	---	---	---	---	---	---
0.2	914	125	1,105	186	1,397	323	1,593	449	1,699	532
0.3	822	134	1,024	193	1,346	331	1,545	463	1,654	539
0.4	733	140	967	202	1,288	342	1,506	476	1,610	551
0.5	664	150	884	214	1,273	352	1,448	481	1,545	557
0.6	606	154	816	220	1,178	359	1,400	493	1,512	566
0.7	584	162	769	230	1,120	369	1,341	502	1,433	578
0.8	551	164	698	236	1,057	381	1,289	511	1,392	591

GPG13M– 4-TON D* MODELS

SPEED E.S.P	T1 (HEATING)		T2 (HEATING)		T3 (HEATING)		T4 (COOLING)		T5 (COOLING)	
	CFM	WATTS	CFM	WATTS	CFM	WATTS	CFM	WATTS	CFM	WATTS
0.1	---	---	---	---	---	---	---	---	---	---
0.2	892	104	1,088	183	1,401	310	1,624	400	1,704	433
0.3	824	112	1,024	191	1,345	318	1,573	408	1,655	440
0.4	756	120	960	199	1,289	326	1,522	416	1,606	448
0.5	687	128	897	207	1,233	333	1,472	424	1,558	456
0.6	619	135	833	214	1,176	341	1,421	431	1,509	464
0.7	551	143	770	222	1,120	349	1,370	439	1,460	472
0.8	482	151	706	230	1,064	357	1,319	447	1,411	480


GPG13M– 5-TON A*/B* MODELS

SPEED E.S.P	T1 (HEATING)		T2 (HEATING)		T3 (HEATING)		T4 (COOLING)		T5 (COOLING)	
	CFM	WATTS	CFM	WATTS	CFM	WATTS	CFM	WATTS	CFM	WATTS
0.1	1,125	162	1,466	315	1,780	496	1,942	649	2,067	792
0.2	1,049	168	1,384	322	1,730	506	1,883	657	2,030	811
0.3	1,000	178	1,347	329	1,664	520	1,859	670	1,982	814
0.4	910	184	1,291	341	1,608	526	1,827	675	1,909	808
0.5	857	197	1,237	350	1,568	532	1,749	683	1,842	798
0.6	809	201	1,185	362	1,515	546	1,706	693	1,789	772
0.7	739	207	1,134	369	1,477	552	1,655	703	1,703	763
0.8	703	218	1,087	382	1,422	562	1,588	705	1,618	732

GPG13M– 5-Ton D* Models


SPEED E.S.P	T1 (HEATING)		T2 (HEATING)		T3 (HEATING)		T4 (COOLING)		T5 (COOLING)	
	CFM	WATTS	CFM	WATTS	CFM	WATTS	CFM	WATTS	CFM	WATTS
0.1	1,100	97	1,445	305	1,762	496	1,878	566	2,080	688
0.2	1,050	105	1,396	313	1,713	504	1,829	574	2,031	696
0.3	1,001	113	1,346	321	1,664	512	1,780	582	1,982	704
0.4	952	121	1,297	329	1,615	521	1,730	590	1,932	712
0.5	903	129	1,248	337	1,566	529	1,681	598	1,883	720
0.6	854	137	1,199	345	1,516	537	1,632	607	1,834	728
0.7	804	145	1,149	353	1,467	545	1,583	615	1,785	736
0.8	755	153	1,100	361	1,418	553	1,534	623	1,736	745

DIMENSIONS

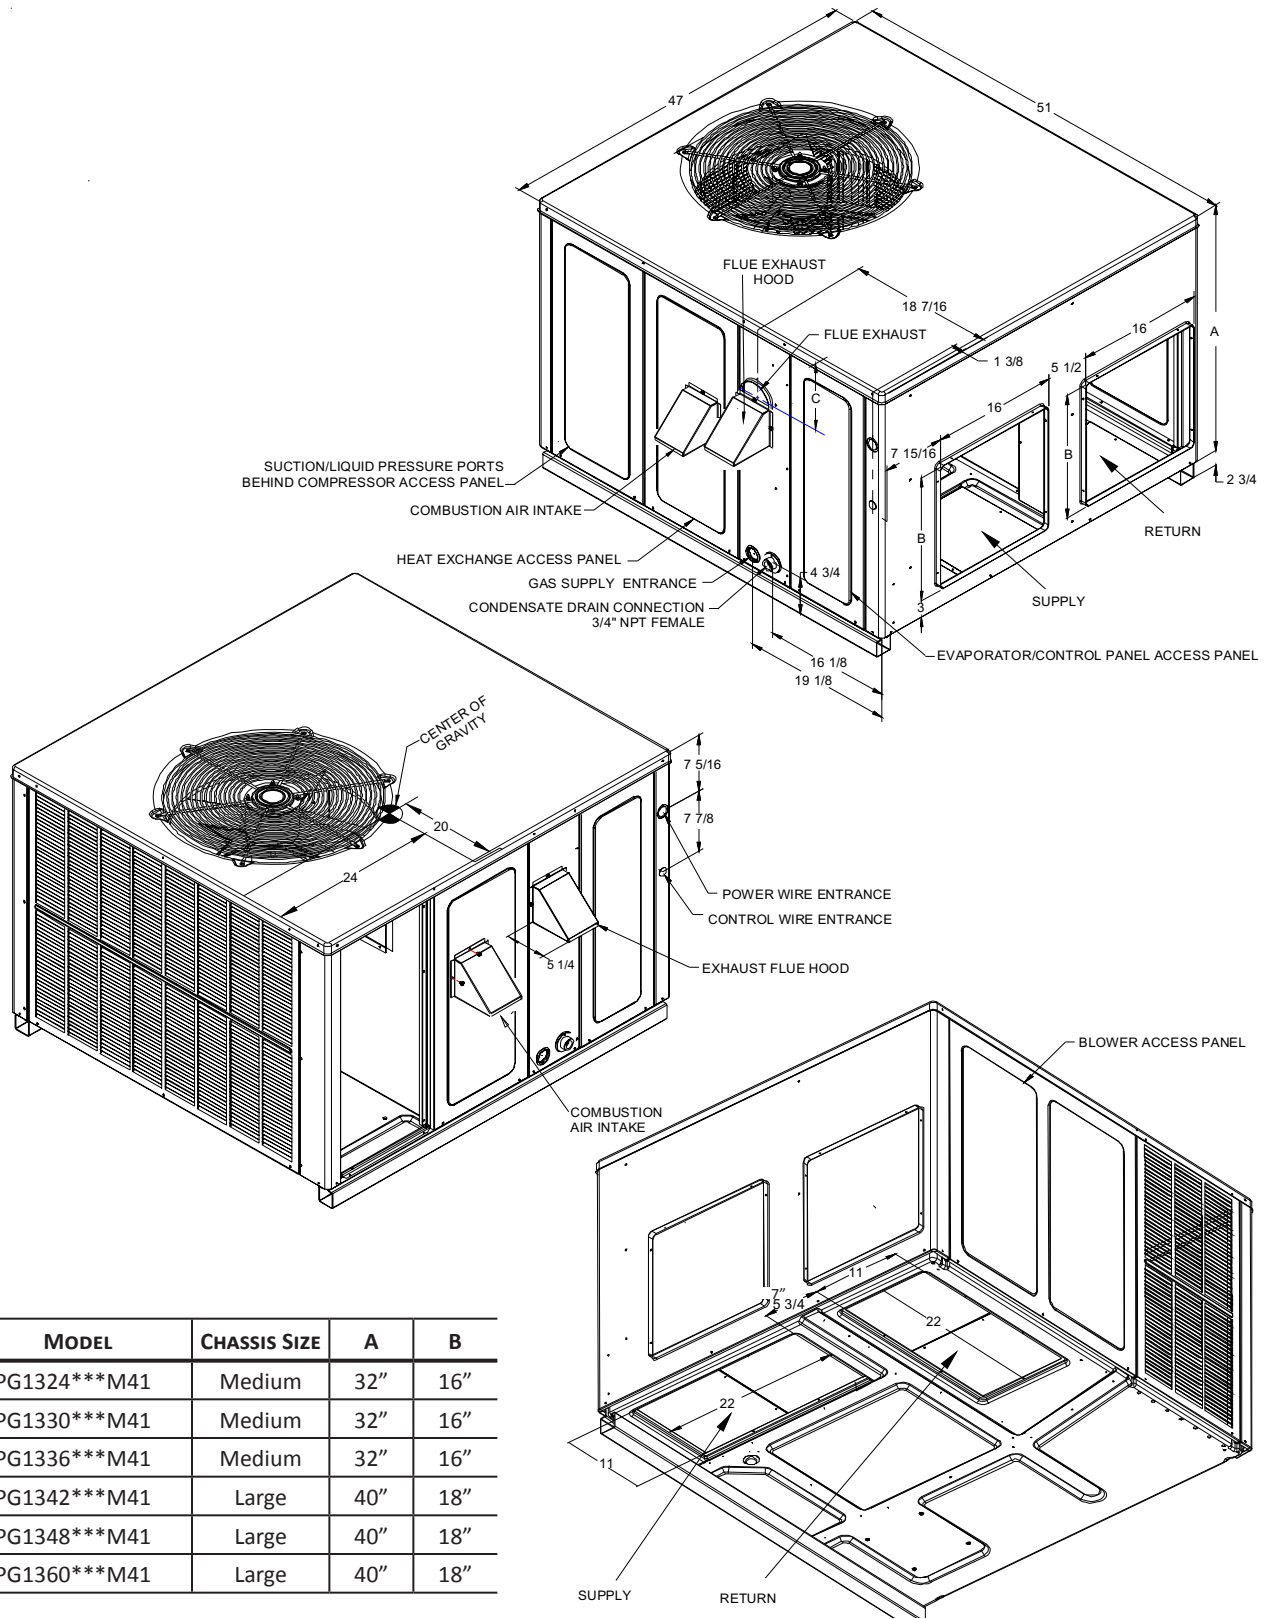

MODEL	CHASSIS SIZE	A	B
GPG1324***M41	Medium	32"	16"
GPG1330***M41	Medium	32"	16"
GPG1336***M41	Medium	32"	16"
GPG1342***M41	Large	40"	18"
GPG1348***M41	Large	40"	18"
GPG1360***M41	Large	40"	18"

WIRING DIAGRAM — GPG1324-42M41

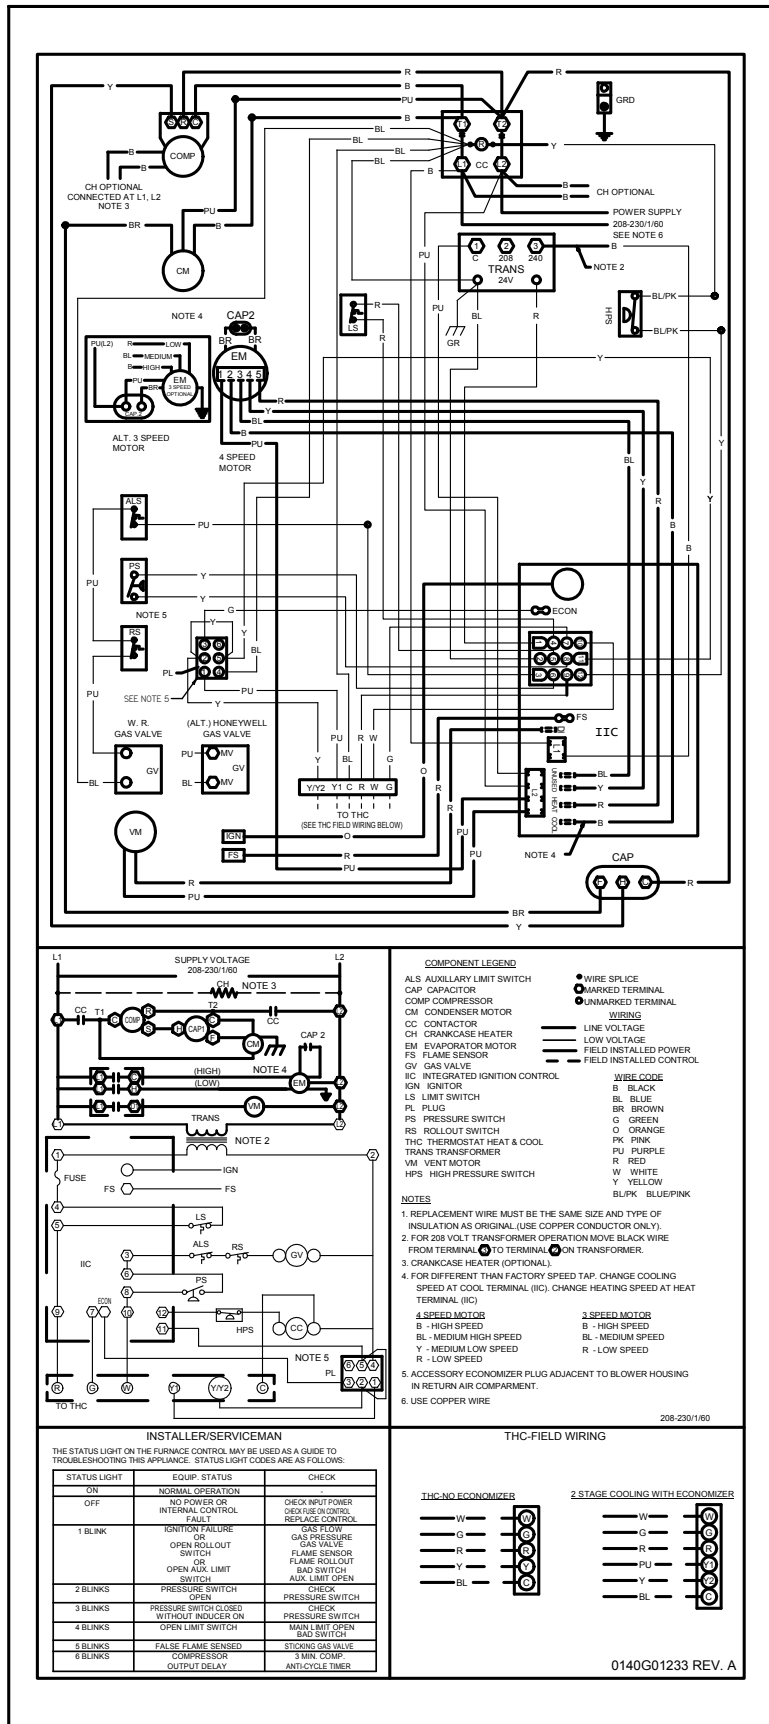


High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

WARNING

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

WIRING DIAGRAM — GPG1348-60M41

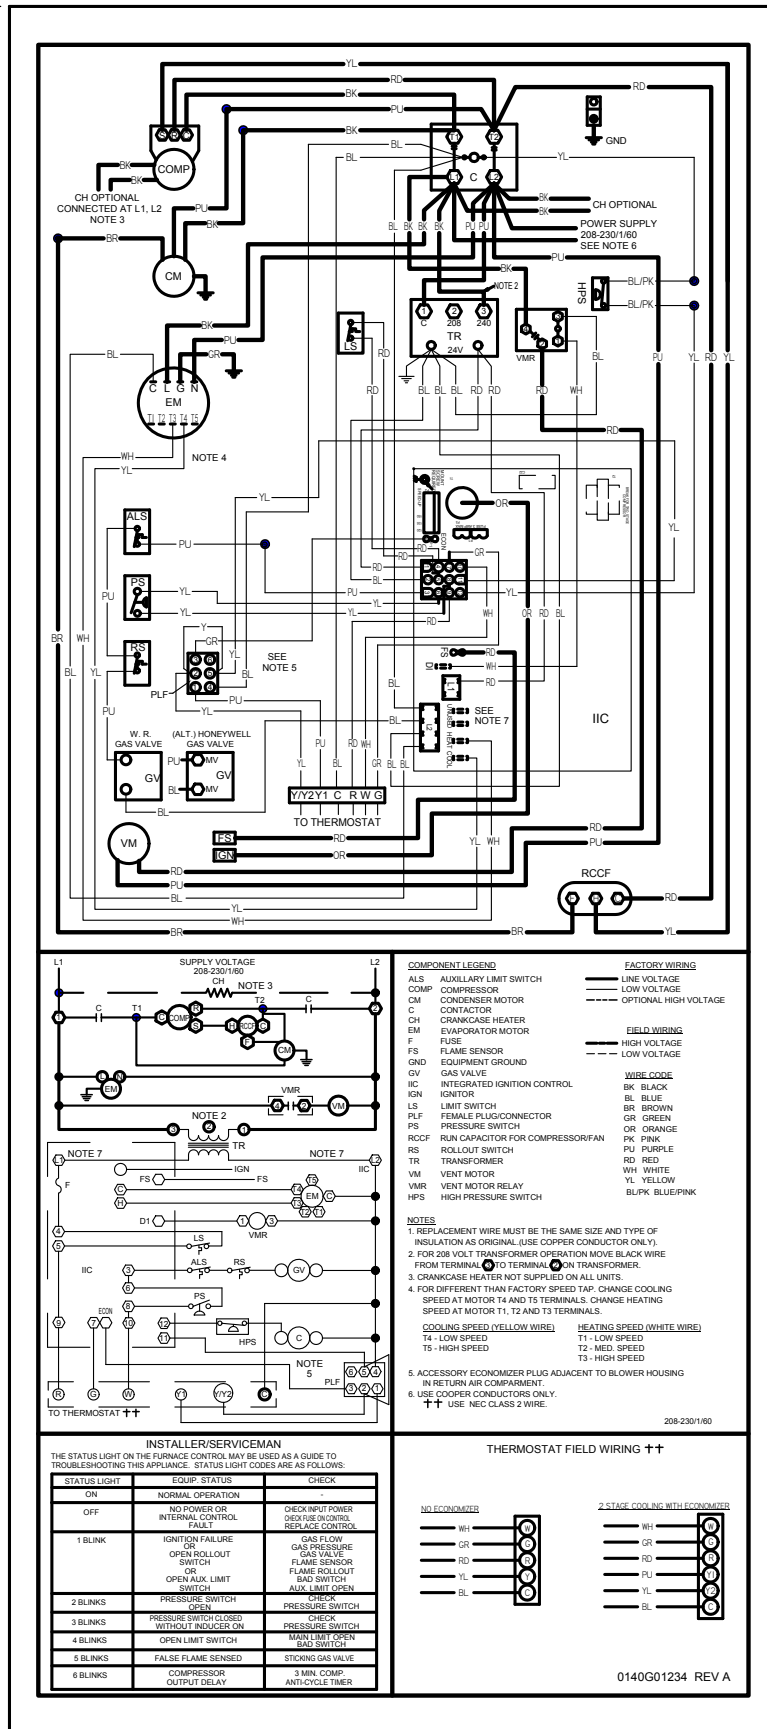

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

WARNING

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

ACCESSORIES

ACCESSORY DESCRIPTION	ITEM NUMBER	
	MEDIUM CHASSIS	LARGE CHASSIS
Concentric Kit	CDK36	CDK4872
Downflow Economizer	PGED101/102	PGED103
Downflow Internal Filter Rack	PGFR101/102/103	PGFR101/102/103
Downflow Manual Damper	PGMDD101/102	PGMDD103
Downflow Motorized Damper	PGMDMD101/102	PGMDMD103
Downflow Square to Round	SQRPG101/102	SQRPG103
External Horizontal Filter Rack	GPGHFR101-103	GPGHFR101-103
Horizontal Duct Cover	20464501PDGK	20464502PDGK
Horizontal Economizer	PGEH101/102	PGEH103
Horizontal Manual Damper	PGMDH102	PGMDH103
Horizontal Motorized Damper	PGMDMH102	PGMDMH103
Horizontal Square to Round	SQRPGH101/102	SQRPGH103
LP Conversion Kit	LPT-03	LPT-03
Roof Curb	PGC101/102/103	PGC101/102/103