



KwiKool® Cooling Systems

BioAir+ KBP1000



FAMILY FEATURES

- Convertible - negative air, scrubber or both
- Standard HEPA Filter
- Dual UVC Lamps for Germicidal Irradiation
- Internal cabinet walls covered with reflective insulation
- Optional charcoal filter
- 3-Speed, Auto Restart
- ETL Certified Performance

PERFORMANCE

UPLA/HEPA Filter	99.99% @ > .3 Microns
UVC Light Wave Length	UVC 17 Watts / Max 85 Watts
Fan Type Centrifugal	Direct Drive
Air Flow H/M/L	1000/875/750
Optional Discharge Flange	12"
Optional Ceiling Kit CK12-SS	12"

APPLICATION

Voltage @ 60Hz	115/1ph
Recommended Breaker Size (A)	15
Amps (A)	7.1
Min/Max Voltage	105-125
Power Consumption (Amps)	7.1
Power Cord Gage/Length	14/6 Feet
Plug Configuration	NEMA 5-15


SHIPPING/LOGISTICS/ HANDLING/QUALITY

	Shipping	Out of Carton
Weight (lbs.)	125	90
Height (in.)	43	38
Width (in.)	24	16.5
Depth (in.)	32	22.25
Weight With Optional Ceiling Kit (lbs.)	147	



spot-coolers.com
800-367-8675

ACCESSORIES

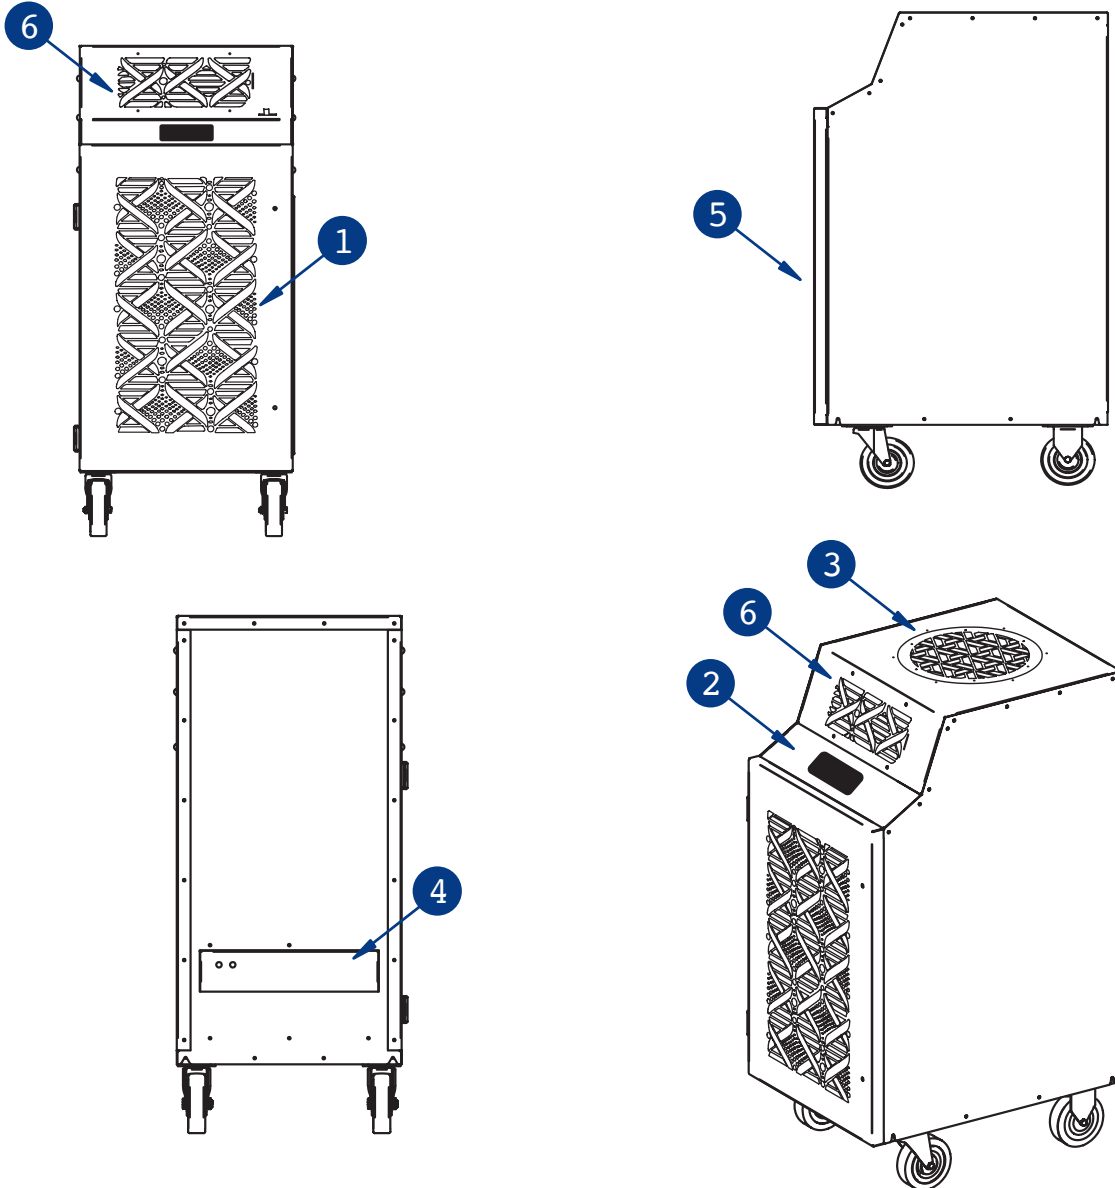

#	Description	#	Description
1	Room Air Return	4	Cord Storage
2	Control Panel (Touch Pad)	5	Filter Access Door
3	Filtered Negative Air Supply	6	Cleaned Room Air Supply



spot-coolers.com
800-367-8675