M-SERIES

SUBMITTAL DATA: MSZ-FH06NA & MUZ-FH06NA

6,000 BTU/H WALL-MOUNTED HEAT PUMP SYSTEM

MITSUBISHI ELECTRIC

Job Name:	
System Reference:	Date:

Indoor Unit: MSZ-FH06NA

Wireless Remote Controller

Outdoor Unit: MUZ-FH06NA

ACCESSORIES:

Indoor Unit

- □ Condensate Pump (BlueDiamond X87-711/721; 115/230V)
- □ Condensate Pump (Sauermann SI30-115/230; 115/230V)
- □ Replacement Platinum Deodorizing Filter (MAC-3000FT-E)
- □ Replacement Anti-allergy Enzyme Filter (MAC-2330FT-E)

Outdoor Unit

- □ Air Discharge Guide (MAC-889SG)
- □ Base Pan Heater (MAC-640BH-U)
- □ Drain Socket (MAC-860DS)

Controls

- □ Wireless Controller (MHK1)
- □ Wired Remote Controller PAR-31MAA (Requires MAC-333IF-E)
- □ Wireless Interface for kumo cloud™ (PAC-WHS01WF-E)
- □ Thermostat Interface (PAC-US444CN-1)

SPECIFICATIONS:

Rated Conditions (Capacity / Input)		
Cooling[1]	Btu/h / W	6,000 / 315
Heating at 47° F[2]	Btu/h / W	8,700 / 545

Capacity Range		Minimum	Maximum
Cooling[1]	Btu/h	1,700	9,000
Heating at 47° F[2]	Btu/h	1,600	14,000
Heating at 17° F[3]	Btu/h	-	10,700
Heating at 5° F[4]	Btu/h	-	8,700

[1] Cooling | Indoor: 80° F(27° C)DB / 67° F(19° C)WB; Outdoor: 95° F(35° C)DB / 75° F(24° C)WB*
[2] Heating at 47°F | Indoor: 70° F (21° C)DB / 60° F (16° C)WB; Outdoor: 47° F (8° C)DB / 43° F (6° C)WB*
[3] Heating at 17° F | Indoor: 70° F(21° C)DB / 60° F(16° C)WB; Outdoor: 17° F(-8° C)DB / 15° F(-9° C)WB*
[4] Heating at 5° F | Indoor: 70° F (21° C)DB / 60° F(16° C)WB; Outdoor: 5° F(-15° C) DB / 5° F(-15° C)WB
* Rating Conditions per AHRI Standard:

Operating Conditons (Indoor Intake Air Temp.) (Max./ Min.)	
Cooling[5]	90° F (32° C) DB / 67° F (19° C) DB
Heating	80° F (27° C) DB / 70° F (21° C) DB

Operating Conditons (Outdoor Intake Air Temp.) (Max./ Min.)	
Cooling[5]	115° F (46° C) DB / 14° F (-10° C) DB
Heating	75° F (24° C) DB / -13° F (-25° C) DB**

[5] Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.
** System cuts out at -18° F (-28° C) to avoid thermistor error and automatically restarts at -14° F (-26° C).

AHRI Efficiency Ratings	
SEER / HSPF	33.1 / 13.5
COP at 47° F / 17° F	4.68 / 3.46

Energy Star®	Yes

ENERGY STAR products are third-party certified by an EPA-recognized Certification Body.

Electrical Power Requirements	208 / 230V, 1-Phase, 60 Hz

Minimum Circuit Ampacity (MCA)		
Indoor / Outdoor	A	1 / 11

Indoor Unit		
Blower Motor (ECM)	F.L.A.	0.67
Blower Motor Output	W	30
SHF / Moisture Removal		0.96 / 0.2 pt./h
Field Drainpipe Size O.D.	In.(mm)	5/8 (15)

Outdoor Unit		
Compressor		DC INVERTER-driven Twin Rotary
Fan Motor (ECM)	F.L.A.	0.50

Airflow Rate (Lo - Med - Hi - Super Hi - Powerful)			
Indoor (Cooling)	DRY	CFM	137-167-221-304-381
	WET		117-143-190-261-328
Indoor (Heating)	DRY		140-167-225-325-437
Outdoor			1,150 / 1,280

Sound Pressure Level (Lo - Med - Hi - Super Hi - Powerful)			
Indoor	Cooling	dB(A)	20-23-29-36-40
	Heating		20-24-29-36-42
Outdoor	Cooling		47
	Heating		48

External Dimensions		
Indoor (H x W x D)	In.(mm)	12 + 11/16 x 36-7/16 x 9-3/16 (305 +17 x 925 x 234)
Outdoor (H x W x D)		21-5/8 x 31-1/2 x 11-1/4 (550 x 800 x 285)

Net Weight		
Indoor	Lbs.(kg)	29 (12)
Outdoor		81 (37)

External Finish	
Indoor	Munsell 1.0Y 9.2 / 0.2
Outdoor	Munsell No. 3Y 7.8 / 1.1

Refrigerant	R410A; 2 lb. 9 oz.

Refrigerant Piping (Flared)		
Liquid (High Pressure)	In.(mm)	1/4 (6.35)
Gas (Low Pressure)		3/8 (9.52)
Max. Total Refrigerant Pipe Length (Height Diff.)	Ft. (m)	40 (12)
Max. Total Refrigerant Pipe Length (Length.)		65 (20)

Specifications are subject to change without notice.

© 2016 Mitsubishi Electric US, Inc.

DIMENSIONS: MSZ-FH06NA & MUZ-FH06NA

MSZ-FH06NA

Unit: inch

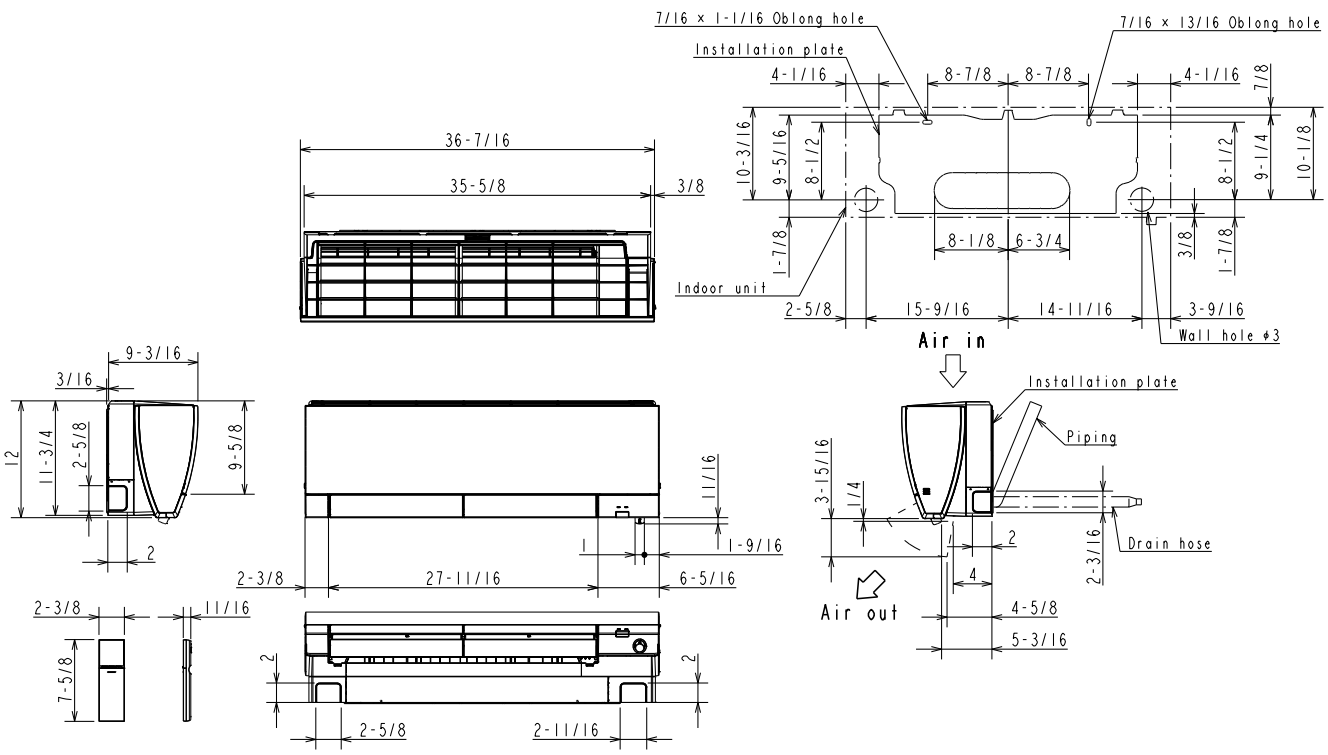

(MSZ-FH06/09/12NA)

Piping	Insulation	ø1-7/16 O.D
	Liquid line	ø1/4 19-11/16 (Flared connection ø1/4)
	Gas line	ø3/8 16-15/16 (Flared connection ø3/8)
Drain hose		Insulation ø1-1/8 Connected part ø5/8 O.D

MUZ-FH06NA

Unit: inch

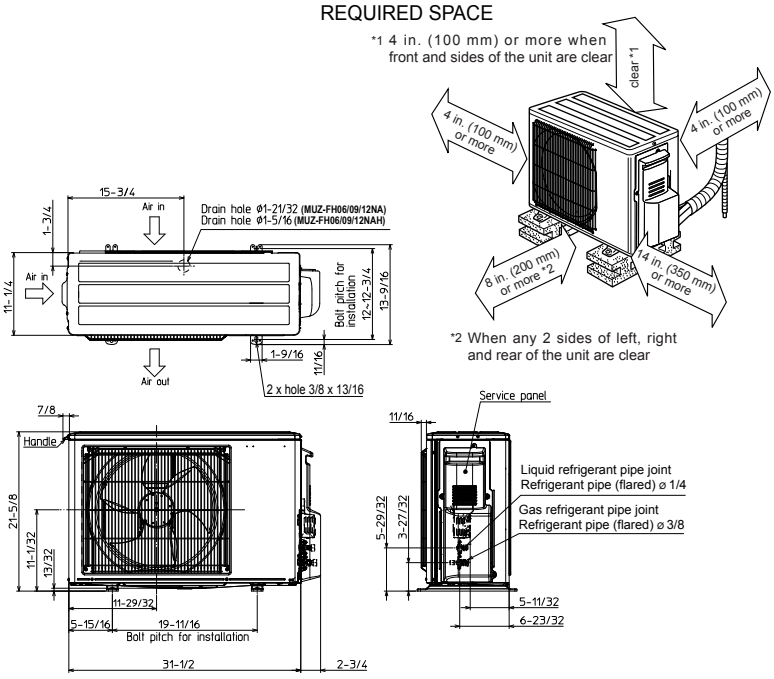

MITSUBISHI ELECTRIC
COOLING & HEATING

1340 Satellite Boulevard. Suwanee, GA 30024
Toll Free: 800-433-4822 www.mehvac.com

FORM# MSZ-FH06NA ~ MUZ-FH06NA - 201603

Specifications are subject to change without notice.

© 2016 Mitsubishi Electric US, Inc.

M-SERIES

SUBMITTAL DATA: MSZ-FH09NA & MUZ-FH09NA-1

9,000 BTU/H WALL-MOUNTED HEAT PUMP SYSTEM

MITSUBISHI ELECTRIC

Job Name:	
System Reference:	Date:

Indoor Unit: MSZ-FH09NA

Wireless Remote Controller

Outdoor Unit: MUZ-FH09NA-1

ACCESSORIES:

Indoor Unit

- □ Condensate Pump (BlueDiamond X87-711/721; 115/230V)
- □ Condensate Pump (Sauermann SI30-115/230; 115/230V)
- □ Replacement Platinum Deodorizing Filter (MAC-3000FT-E)
- □ Replacement Anti-allergy Enzyme Filter (MAC-2330FT-E)

Outdoor Unit

- □ Air Discharge Guide (MAC-889SG)
- □ Base Pan Heater (MAC-640BH-U)
- □ Drain Socket (MAC-860DS)

Controls

- □ Wireless Controller (MHK1)
- □ Wired Remote Controller PAR-31MAA (Requires MAC-333IF-E)
- □ Wireless Interface for kumo cloud™ (PAC-WHS01WF-E)
- □ Thermostat Interface (PAC-US444CN-1)

SPECIFICATIONS:

Rated Conditions (Capacity / Input)		
Cooling[1]	Btu/h / W	9,000 / 560
Heating at 47° F[2]	Btu/h / W	10,900 / 710

Capacity Range		Minimum	Maximum
Cooling[1]	Btu/h	1,700	12,000
Heating at 47° F[2]	Btu/h	1,600	18,000
Heating at 17° F[3]	Btu/h	-	12,200
Heating at 5° F[4]	Btu/h	-	10,900

[1] Cooling | Indoor: 80° F(27° C)DB / 67° F(19° C)WB; Outdoor: 95° F(35° C)DB / 75° F(24° C)WB*
[2] Heating at 47°F | Indoor: 70° F (21° C)DB / 60° F (16° C)WB; Outdoor: 47° F (8° C)DB / 43° F (6° C)WB*
[3] Heating at 17° F | Indoor: 70° F(21° C)DB / 60° F(16° C)WB; Outdoor: 17° F(-8° C)DB / 15° F(-9° C)WB*
[4] Heating at 5° F | Indoor: 70° F (21° C)DB / 60° F(16° C)WB; Outdoor: 5° F(-15° C) DB / 5° F(-15° C)WB
* Rating Conditions per AHRI Standard:

Operating Conditons (Indoor Intake Air Temp.) (Max./ Min.)	
Cooling[5]	90° F (32° C) DB / 67° F (19° C) DB
Heating	80° F (27° C) DB / 70° F (21° C) DB

Operating Conditons (Outdoor Intake Air Temp.) (Max./ Min.)	
Cooling[5]	115° F (46° C) DB / 14° F (-10° C) DB
Heating	75° F (24° C) DB / -13° F (-25° C) DB**

[5] Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.
** System cuts out at -18° F (-28° C) to avoid thermistor error and automatically restarts at -14° F (-26° C).

AHRI Efficiency Ratings	
SEER / HSPF	30.5 / 13.5
COP at 47° F / 17° F	4.5 / 3.33

Energy Star®	Yes

ENERGY STAR products are third-party certified by an EPA-recognized Certification Body.

Electrical Power Requirements	208 / 230V, 1-Phase, 60 Hz

Minimum Circuit Ampacity (MCA)		
Indoor / Outdoor	A	1 / 11

Indoor Unit		
Blower Motor (ECM)	F.L.A.	0.67
Blower Motor Output	W	30
SHF / Moisture Removal		0.92 / 0.6 pt./h
Field Drainpipe Size O.D.	In.(mm)	5/8 (15)

Outdoor Unit		
Compressor		DC INVERTER-driven Twin Rotary
Fan Motor (ECM)	F.L.A.	0.50

Airflow Rate (Lo - Med - Hi - Super Hi - Powerful)			
Indoor (Cooling)	DRY	CFM	137-167-221-304-381
	WET		117-143-190-261-328
Indoor (Heating)	DRY		140-167-225-325-437
Outdoor			1,150 / 1,280

Sound Pressure Level (Lo - Med - Hi - Super Hi - Powerful)			
Indoor	Cooling	dB(A)	20-23-29-36-40
	Heating		20-24-29-36-42
Outdoor	Cooling		48
	Heating		49

External Dimensions		
Indoor (H x W x D)	In.(mm)	12 + 11/16 x 36-7/16 x 9-3/16 (305 +17 x 925 x 234)
Outdoor (H x W x D)		21-5/8 x 31-1/2 x 11-1/4 (550 x 800 x 285)

Net Weight		
Indoor	Lbs.(kg)	29 (12)
Outdoor		81 (37)

External Finish	
Indoor	Munsell 1.0Y 9.2 / 0.2
Outdoor	Munsell No. 3Y 7.8 / 1.1

Refrigerant	R410A; 2 lb. 9 oz.

Refrigerant Piping (Flared)		
Liquid (High Pressure)	In.(mm)	1/4 (6.35)
Gas (Low Pressure)		3/8 (9.52)
Max. Total Refrigerant Pipe Length (Height Diff.)	Ft. (m)	40 (12)
Max. Total Refrigerant Pipe Length (Length.)		65 (20)

Specifications are subject to change without notice.

© 2016 Mitsubishi Electric US, Inc.

DIMENSIONS: MSZ-FH09NA & MUZ-FH09NA-1

MSZ-FH09NA

Unit: inch

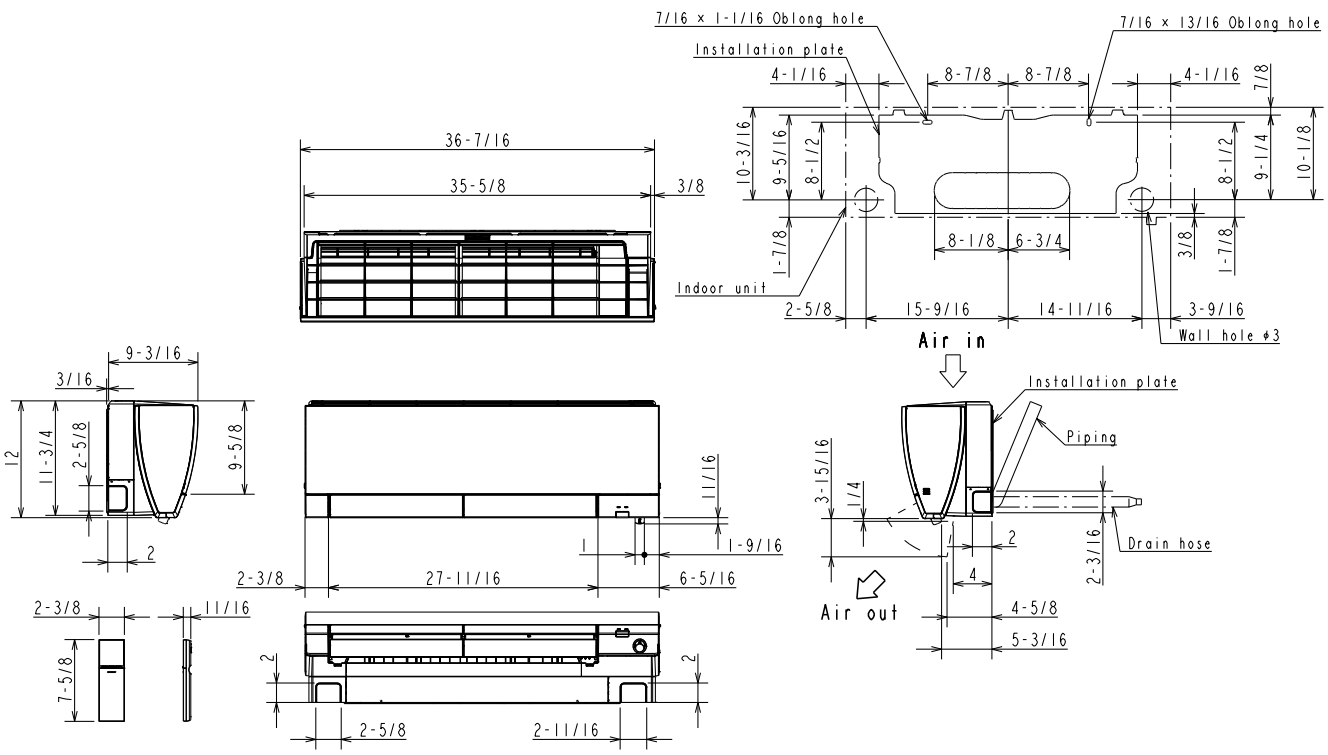

(MSZ-FH06/09/12NA)

Piping	Insulation	ø1-7/16 O.D
	Liquid line	ø1/4 19-11/16 (Flared connection ø1/4)
	Gas line	ø3/8 16-15/16 (Flared connection ø3/8)
Drain hose		Insulation ø1-1/8 Connected part ø5/8 O.D

MUZ-FH09NA-1

Unit: inch

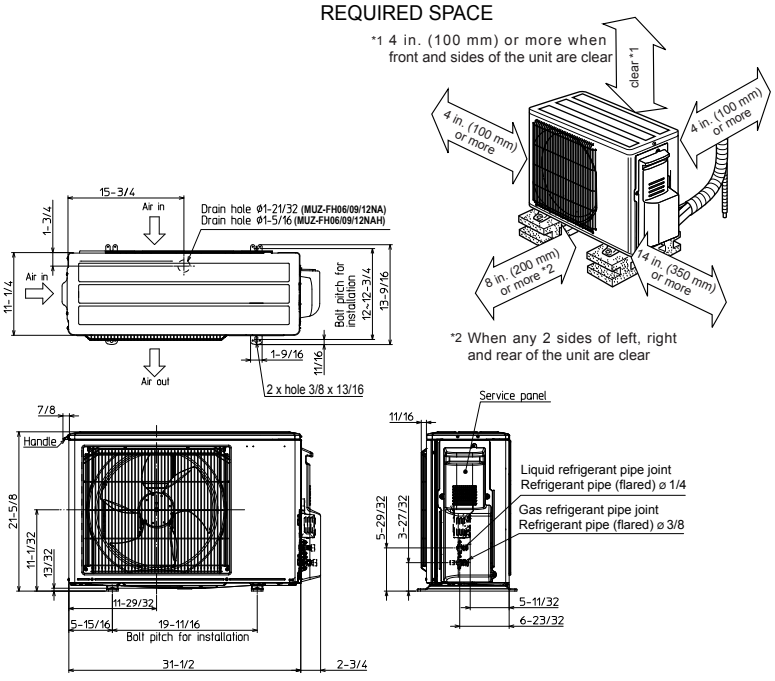

1340 Satellite Boulevard. Suwanee, GA 30024
Toll Free: 800-433-4822 www.mehvac.com

FORM# MSZ-FH09NA ~ MUZ-FH09NA-1 - 201603

Specifications are subject to change without notice.

© 2016 Mitsubishi Electric US, Inc.

M-SERIES

SUBMITTAL DATA: MSZ-FH12NA & MUZ-FH12NA-1

12,000 BTU/H WALL-MOUNTED HEAT PUMP SYSTEM

MITSUBISHI ELECTRIC

Job Name:	
System Reference:	Date:

Indoor Unit: MSZ-FH12NA

Wireless Remote Controller

Outdoor Unit: MUZ-FH12NA-1

ACCESSORIES:

Indoor Unit

- □ Condensate Pump (BlueDiamond X87-711/721; 115/230V)
- □ Condensate Pump (Sauermann SI30-115/230; 115/230V)
- □ Replacement Platinum Deodorizing Filter (MAC-3000FT-E)
- □ Replacement Anti-allergy Enzyme Filter (MAC-2330FT-E)

Outdoor Unit

- □ Air Discharge Guide (MAC-889SG)
- □ Base Pan Heater (MAC-640BH-U)
- □ Drain Socket (MAC-860DS)

Controls

- □ Wireless Controller (MHK1)
- □ Wired Remote Controller PAR-31MAA (Requires MAC-333IF-E)
- □ Wireless Interface for kumo cloud™ (PAC-WHS01WF-E)
- □ Thermostat Interface (PAC-US444CN-1)

SPECIFICATIONS:

Rated Conditions (Capacity / Input)		
Cooling[1]	Btu/h / W	12,000 / 870
Heating at 47° F[2]	Btu/h / W	13,600 / 950

Capacity Range		Minimum	Maximum
Cooling[1]	Btu/h	2,500	13,600
Heating at 47° F[2]	Btu/h	3,700	21,000
Heating at 17° F[3]	Btu/h	-	13,600
Heating at 5° F[4]	Btu/h	-	13,600

[1] Cooling | Indoor: 80° F(27° C)DB / 67° F(19° C)WB; Outdoor: 95° F(35° C)DB / 75° F(24° C)WB*
[2] Heating at 47°F | Indoor: 70° F (21° C)DB / 60° F (16° C)WB; Outdoor: 47° F (8° C)DB / 43° F (6° C)WB*
[3] Heating at 17° F | Indoor: 70° F(21° C)DB / 60° F(16° C)WB; Outdoor: 17° F(-8° C)DB / 15° F(-9° C)WB*
[4] Heating at 5° F | Indoor: 70° F (21° C)DB / 60° F(16° C)WB; Outdoor: 5° F(-15° C) DB / 5° F(-15° C)WB
* Rating Conditions per AHRI Standard:

Operating Conditons (Indoor Intake Air Temp.) (Max./ Min.)	
Cooling[5]	90° F (32° C) DB / 67° F (19° C) DB
Heating	80° F (27° C) DB / 70° F (21° C) DB

Operating Conditons (Outdoor Intake Air Temp.) (Max./ Min.)	
Cooling[5]	115° F (46° C) DB / 14° F (-10° C) DB
Heating	75° F (24° C) DB / -13° F (-25° C) DB**

[5] Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.
** System cuts out at -18° F (-28° C) to avoid thermistor error and automatically restarts at -14° F (-26° C).

AHRI Efficiency Ratings	
SEER / HSPF	26.1 / 12.5
COP at 47° F / 17° F	4.2 / 3.34

Energy Star®	Yes

ENERGY STAR products are third-party certified by an EPA-recognized Certification Body.

Electrical Power Requirements	208 / 230V, 1-Phase, 60 Hz

Minimum Circuit Ampacity (MCA)		
Indoor / Outdoor	A	1 / 11

Indoor Unit		
Blower Motor (ECM)	F.L.A.	0.67
Blower Motor Output	W	30
SHF / Moisture Removal		0.83 / 1.9 pt./h
Field Drainpipe Size O.D.	In.(mm)	5/8 (15)

Outdoor Unit		
Compressor		DC INVERTER-driven Twin Rotary
Fan Motor (ECM)	F.L.A.	0.50

Airflow Rate (Lo - Med - Hi - Super Hi - Powerful)			
Indoor (Cooling)	DRY	CFM	137-167-221-304-398
	WET		117-143-190-261-342
Indoor (Heating)	DRY		140-167-225-325-454
Outdoor			1,190 / 1,320

Sound Pressure Level (Lo - Med - Hi - Super Hi - Powerful)			
Indoor	Cooling	dB(A)	21-24-29-36-41
	Heating		21-24-29-36-42
Outdoor	Cooling		49
	Heating		51

External Dimensions		
Indoor (H x W x D)	In.(mm)	12 + 11/16 x 36-7/16 x 9-3/16 (305 +17 x 925 x 234)
Outdoor (H x W x D)		21-5/8 x 31-1/2 x 11-1/4 (550 x 800 x 285)

Net Weight		
Indoor	Lbs.(kg)	29 (12)
Outdoor		83 (38)

External Finish	
Indoor	Munsell 1.0Y 9.2 / 0.2
Outdoor	Munsell No. 3Y 7.8 / 1.1

Refrigerant	R410A; 2 lb. 9 oz.

Refrigerant Piping (Flared)		
Liquid (High Pressure)	In.(mm)	1/4 (6.35)
Gas (Low Pressure)		3/8 (9.52)
Max. Total Refrigerant Pipe Length (Height Diff.)	Ft. (m)	40 (12)
Max. Total Refrigerant Pipe Length (Length.)		65 (20)

Specifications are subject to change without notice.

© 2016 Mitsubishi Electric US, Inc.

DIMENSIONS: MSZ-FH12NA & MUZ-FH12NA-1

MSZ-FH12NA

Unit: inch

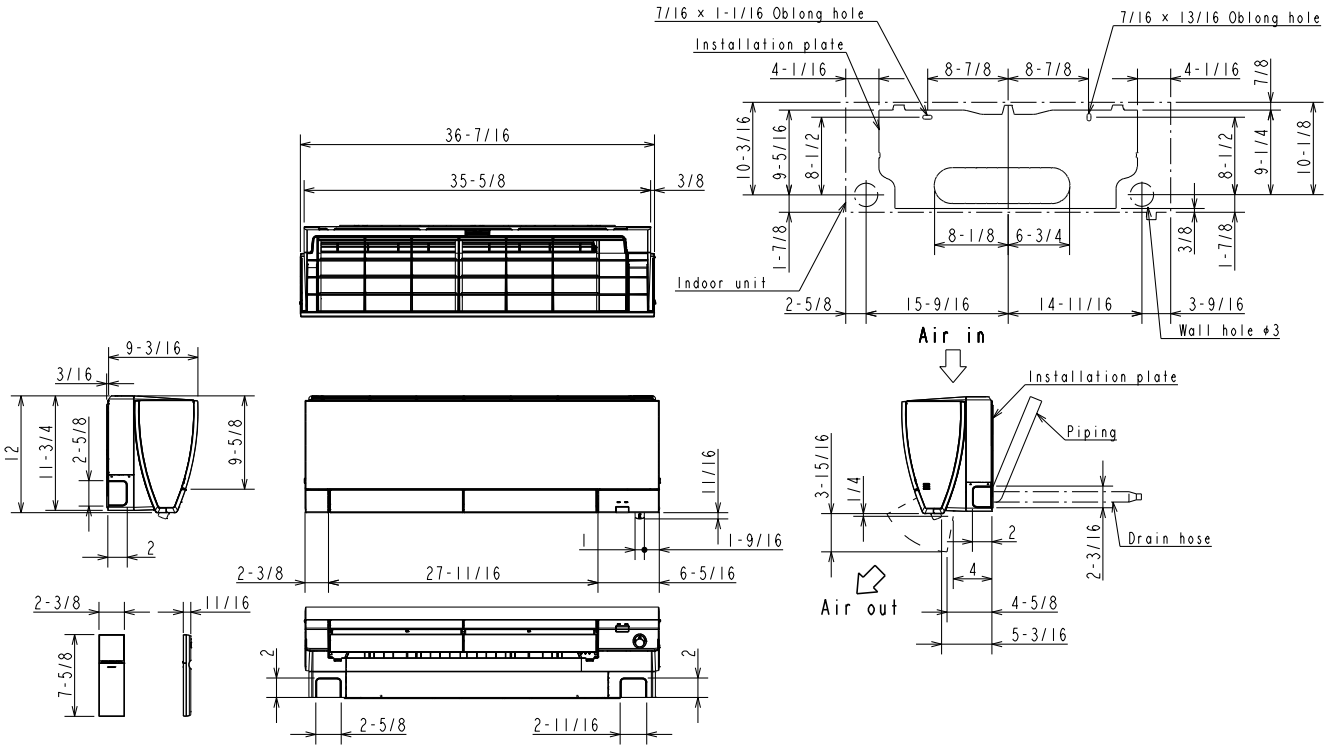

(MSZ-FH06/09/12NA)

Piping	Insulation	ø1-7/16 O.D
	Liquid line	ø1/4 19-11/16 (Flared connection ø1/4)
	Gas line	ø3/8 16-15/16 (Flared connection ø3/8)
Drain hose		Insulation ø1-1/8 Connected part ø5/8 O.D

MUZ-FH12NA-1

Unit: inch

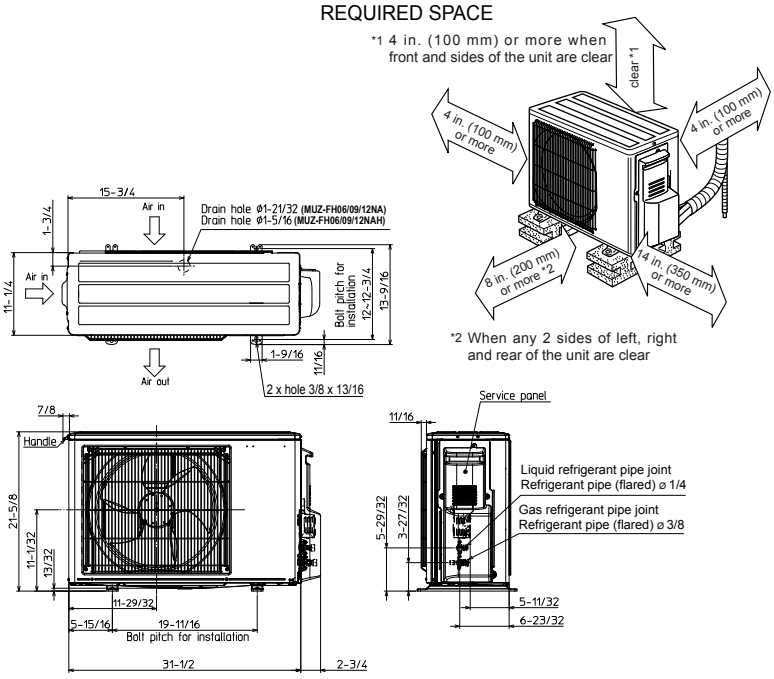

MITSUBISHI ELECTRIC
COOLING & HEATING

1340 Satellite Boulevard. Suwanee, GA 30024
Toll Free: 800-433-4822 www.mehvac.com

FORM# MSZ-FH12NA ~ MUZ-FH12NA-1 - 201603

Specifications are subject to change without notice.

© 2016 Mitsubishi Electric US, Inc.

M-SERIES

SUBMITTAL DATA: MSZ-FH15NA & MUZ-FH15NA

15,000 BTU/H WALL-MOUNTED HEAT PUMP SYSTEM

MITSUBISHI ELECTRIC

Job Name:	
System Reference:	Date:

Indoor Unit: MSZ-FH15NA

Wireless Remote Controller

Outdoor Unit: MUZ-FH15NA

ACCESSORIES:

Indoor Unit

- □ Condensate Pump (BlueDiamond X87-711/721; 115/230V)
- □ Condensate Pump (Sauermann SI30-115/230; 115/230V)
- □ Replacement Platinum Deodorizing Filter (MAC-3000FT-E)
- □ Replacement Anti-allergy Enzyme Filter (MAC-2330FT-E)

Outdoor Unit

- □ Air Discharge Guide (MAC-886SG-E)
- □ Base Pan Heater (MAC-642BH-U)
- □ Drain Socket (MAC-851DS)

Controls

- □ Wireless Controller (MHK1)
- □ Wired Remote Controller PAR-31MAA (Requires MAC-333IF-E)
- □ Wireless Interface for kumo cloud™ (PAC-WHS01WF-E)
- □ Thermostat Interface (PAC-US444CN-1)

SPECIFICATIONS:

Rated Conditions (Capacity / Input)		
Cooling[1]	Btu/h / W	15,000 / 1,200
Heating at 47° F[2]	Btu/h / W	18,000 / 1,300

Capacity Range		Minimum	Maximum
Cooling[1]	Btu/h	6,450	19,000
Heating at 47° F[2]	Btu/h	5,150	24,000
Heating at 17° F[3]	Btu/h	-	18,000
Heating at 5° F[4]	Btu/h	-	18,000

[1] Cooling | Indoor: 80° F(27° C)DB / 67° F(19° C)WB; Outdoor: 95° F(35° C)DB / 75° F(24° C)WB*
[2] Heating at 47°F | Indoor: 70° F (21° C)DB / 60° F (16° C)WB; Outdoor: 47° F (8° C)DB / 43° F (6° C)WB*
[3] Heating at 17° F | Indoor: 70° F(21° C)DB / 60° F(16° C)WB; Outdoor: 17° F(-8° C)DB / 15° F(-9° C)WB*
[4] Heating at 5° F | Indoor: 70° F (21° C)DB / 60° F(16° C)WB; Outdoor: 5° F(-15° C) DB / 5° F(-15° C)WB
* Rating Conditions per AHRI Standard:

Operating Conditons (Indoor Intake Air Temp.) (Max./ Min.)	
Cooling[5]	90° F (32° C) DB / 67° F (19° C) DB
Heating	80° F (27° C) DB / 70° F (21° C) DB

Operating Conditons (Outdoor Intake Air Temp.) (Max./ Min.)	
Cooling[5]	115° F (46° C) DB / 14° F (-10° C) DB
Heating	75° F (24° C) DB / -13° F (-25° C) DB**

[5] Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.
** System cuts out at -18° F (-28° C) to avoid thermistor error and automatically restarts at -14° F (-26° C).

AHRI Efficiency Ratings	
SEER / HSPF	22 / 12
COP at 47° F / 17° F	4.06 / 3.19

Energy Star®	Yes

ENERGY STAR products are third-party certified by an EPA-recognized Certification Body.

Electrical Power Requirements	208 / 230V, 1-Phase, 60 Hz

Minimum Circuit Ampacity (MCA)		
Indoor / Outdoor	A	1 / 16

Indoor Unit		
Blower Motor (ECM)	F.L.A.	0.67
Blower Motor Output	W	30
SHF / Moisture Removal		0.70 / 4.0 pt./h
Field Drainpipe Size O.D.	In.(mm)	5/8 (15)

Outdoor Unit		
Compressor		DC INVERTER-driven Twin Rotary
Fan Motor (ECM)	F.L.A.	0.93

Airflow Rate (Lo - Med - Hi - Super Hi - Powerful)			
Indoor (Cooling)	DRY	CFM	225-262-304-355-411
	WET		194-225-261-305-354
Indoor (Heating)	DRY		201-254-317-394-497
Outdoor			1,220 / 1,420

Sound Pressure Level (Lo - Med - Hi - Super Hi - Powerful)			
Indoor	Cooling	dB(A)	27-31-35-39-44
	Heating		25-29-34-39-46
Outdoor	Cooling		51
	Heating		55

External Dimensions		
Indoor (H x W x D)	In.(mm)	12 + 11/16 x 36-7/16 x 9-3/16 (305 +17 x 925 x 234)
Outdoor (H x W x D)		34-5/8 x 33-1/16 x 13 (880 x 840 x 330)

Net Weight		
Indoor	Lbs.(kg)	29 (12)
Outdoor		124 (56)

External Finish	
Indoor	Munsell 1.0Y 9.2 / 0.2
Outdoor	Munsell No. 3Y 7.8 / 1.1

Refrigerant	R410A; 3 lb. 7 oz.

Refrigerant Piping (Flared)		
Liquid (High Pressure)	In.(mm)	1/4 (6.35)
Gas (Low Pressure)		1/2 (12.7)
Max. Total Refrigerant Pipe Length (Height Diff.)	Ft. (m)	50 (15)
Max. Total Refrigerant Pipe Length (Length.)		100 (30)

Specifications are subject to change without notice.

© 2016 Mitsubishi Electric US, Inc.

DIMENSIONS: MSZ-FH15NA & MUZ-FH15NA

MSZ-FH15NA

Unit: inch

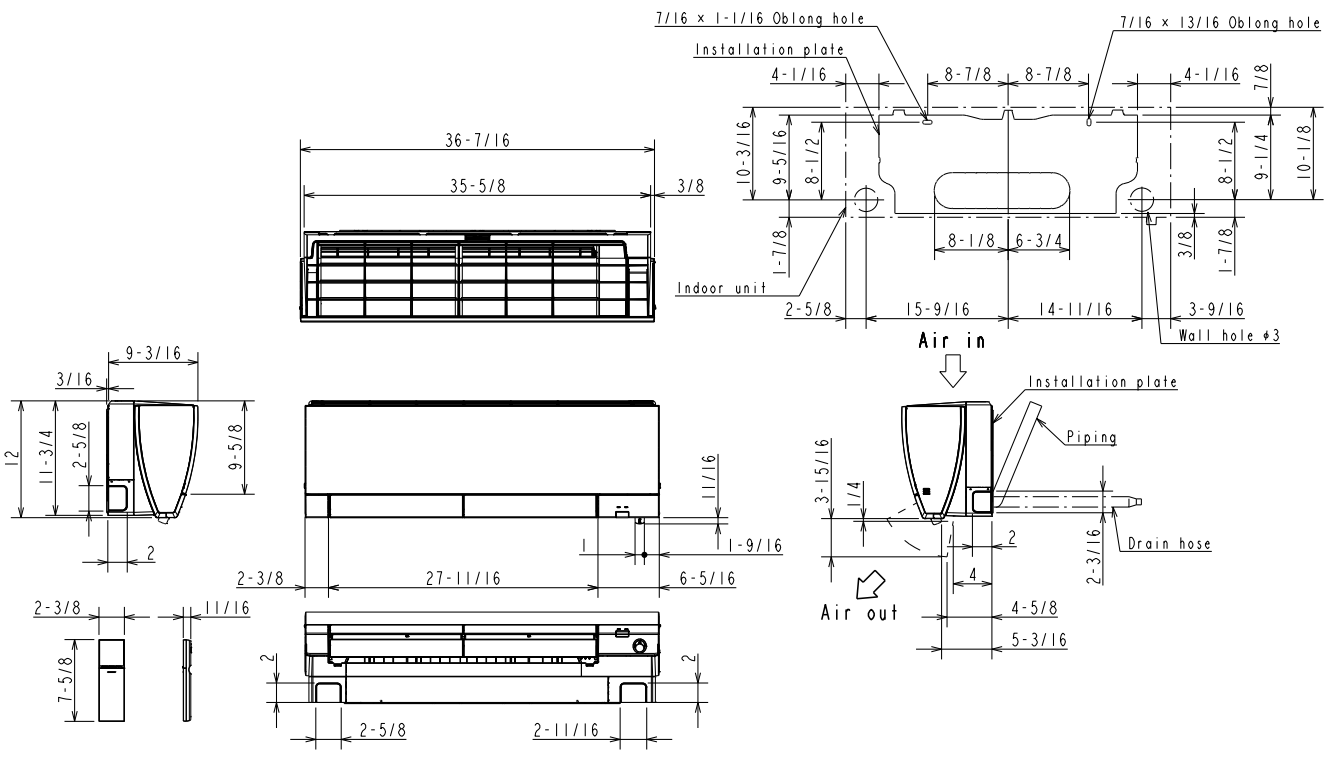

(MSZ-FH15/18NA/18NA2)

Piping	Insulation	ϕ1-7/16 O.D
	Liquid line	ϕ1/4 19-11/16 (Flared connection ϕ1/4)
	Gas line	ϕ3/8 16-15/16 (Flared connection ϕ1/2)
Drain hose		Insulation ϕ1-1/8 Connected part ϕ5/8 O.D

MUZ-FH15NA

Unit: inch

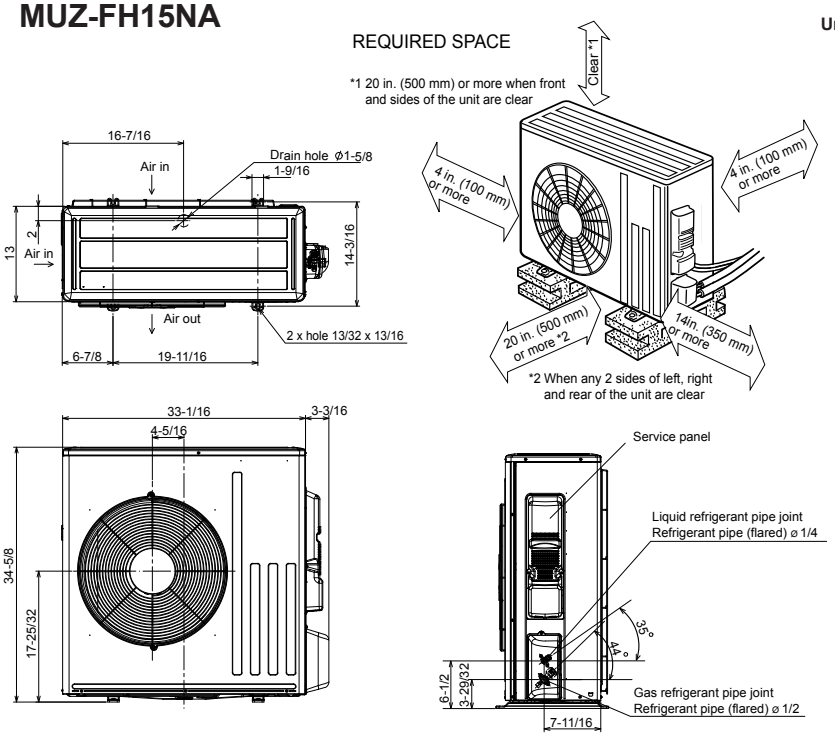

MITSUBISHI ELECTRIC
COOLING & HEATING

1340 Satellite Boulevard. Suwanee, GA 30024
Toll Free: 800-433-4822 www.mehvac.com

FORM# MSZ-FH15NA / MUZ-FH15NA - 201603

Specifications are subject to change without notice.

© 2016 Mitsubishi Electric US, Inc.

M-SERIES

SUBMITTAL DATA: MSZ-FH18NA

18,000 BTU/H WALL-MOUNTED INDOOR UNIT FOR MXZ-C MULTI-ZONE HEAT-PUMP SYSTEMS

MITSUBISHI ELECTRIC

Job Name:	
System Reference:	Date:

Indoor Unit: MSZ-FH18NA

Wireless Remote Controller

ACCESSORIES:

Indoor Unit

- □ Condensate Pump (BlueDiamond X87-711/721; 115/230V)
- □ Condensate Pump (Sauermann SI30-115/230; 115/230V)
- □ Replacement Platinum Deodorizing Filter (MAC-3000FT-E)
- □ Replacement Anti-allergy Enzyme Filter (MAC-2330FT-E)

Controls

- □ Wireless Controller (MHK1)
- □ Wired Remote Controller PAR-31MAA (Requires MAC-333IF-E)
- □ Wireless Interface for kumo cloud™ (PAC-WHS01WF-E)
- □ Thermostat Interface (PAC-US444CN-1)

SPECIFICATIONS:

Rated Capacity*		
Cooling[1]	Btu/h / W	17,200
Heating at 47° F[2]	Btu/h / W	20,300

Rating Conditions per AHRI Standard:
[1] Cooling | Indoor: 80° F(27° C)DB / 67° F(19° C)WB; Outdoor: 95° F(35° C)DB / 75° F(24° C)WB
[2] Heating at 47° F | Indoor: 70° F (21° C)DB / 60° F (16° C)WB; Outdoor: 47° F (8° C)DB / 43° F (6° C)WB

For data on specific indoor units (all ducted, all non-ducted, and both ducted and non-ducted) combinations, see the MXZ Technical and Service Manual.

Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

Electrical Power Requirements	208 / 230V, 1-Phase, 60 Hz

Minimum Circuit Ampacity (MCA)	A	1
Blower Motor (ECM)	F.L.A.	0.67
Blower Motor Output	W	30
Field Drainpipe Size O.D.	In.(mm)	5/8 (15)

Airflow Rate (Lo - Med - Hi - Super Hi - Powerful)			
Cooling	DRY	CFM	225-262-304-355-437
	WET		194-225-261-305-376
Heating	DRY		201-254-317-394-514

Sound Pressure Level (Lo - Med - Hi - Super Hi - Powerful)		
Cooling	dB(A)	27-31-35-39-44
Heating		25-29-34-39-46

External Dimensions (H x W x D)	In.(mm)	12 + 11/16 x 36-7/16 x 9-3/16 (305 +17 x 925 x 234)
Net Weight	Lbs.(kg)	29 (12)
External Finish	Munsell 1.0Y 9.2 / 0.2	

Refrigerant Piping (Flared)		
Liquid (High Pressure)	In.(mm)	1/4 (6.35)
Gas (Low Pressure)		1/2 (12.7)

Specifications are subject to change without notice.

© 2015 Mitsubishi Electric US, Inc.

DIMENSIONS: MSZ-FH18NA

MSZ-FH18NA

Unit: mm (in.)

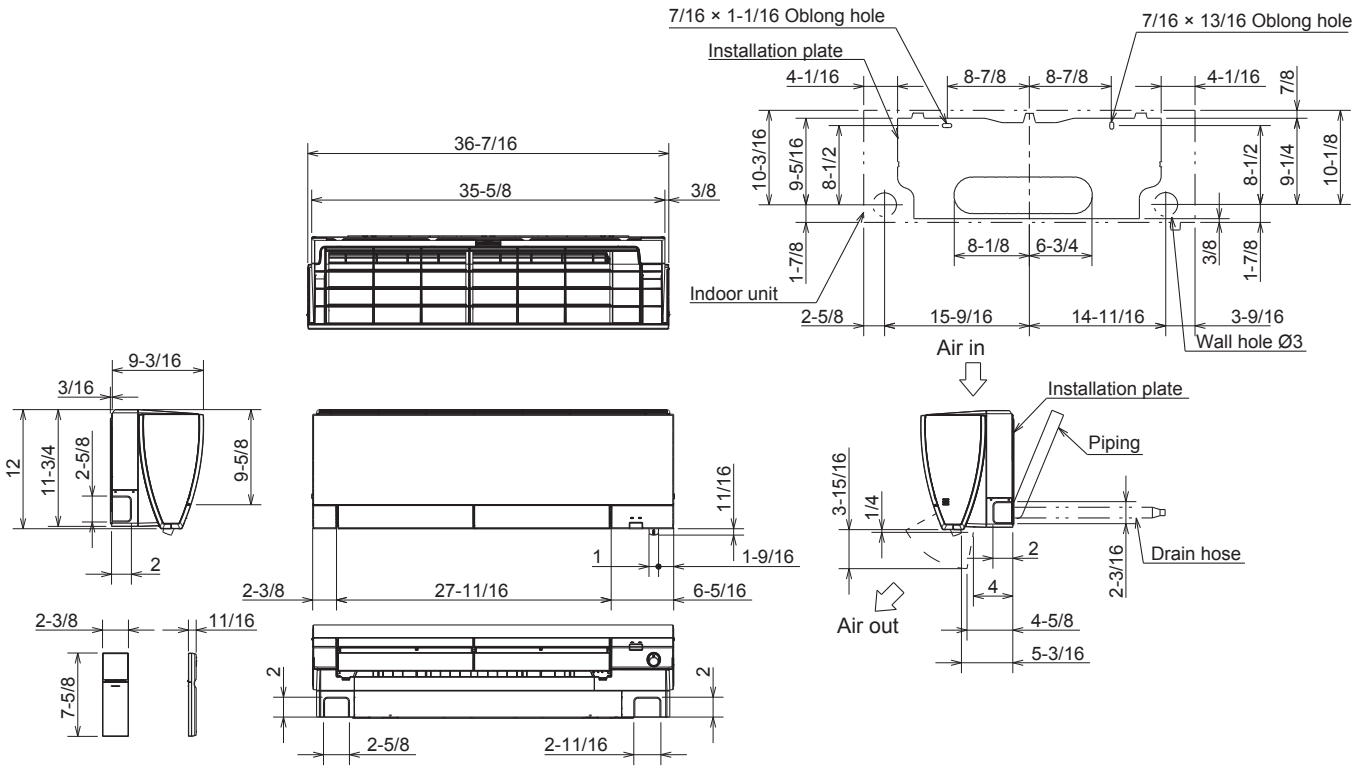

(MSZ-FH15/18NA)

Piping	Insulation	Ø1-7/16 O.D
	Liquid line	Ø1/4 19-11/16 (Flared connection Ø1/4)
	Gas line	Ø3/8 16-15/16 (Flared connection Ø1/2)
Drain hose		Insulation Ø1-1/8 Connected part Ø5/8 O.D

AHRI CERTIFIED www.ahridirectory.org Unitary Small HP AHRI Standard 210/240 Certification applies only when the complete system is listed with AHRI

C ETL LISTED US Intertek

MITSUBISHI ELECTRIC
COOLING & HEATING

1340 Satellite Boulevard
Suwanee, GA 30024
Toll Free: 800-433-4822
www.mehvac.com

FORM# MSZ-FH18NAFOR MXZ-C MULTI-ZONE SYSTEMS - 201603
Specifications are subject to change without notice.
© 2015 Mitsubishi Electric US, Inc.