


Specification Sheet

Model # SA-40WR-HPE

Allows solar panel location to be independent from the fan, so each can be placed in the ideal location on the roof. Can also be used with larger solar panels for improved performance, to offset poor lighting environments. Only product certified through Dade County and approved for high winds. (160 mph)

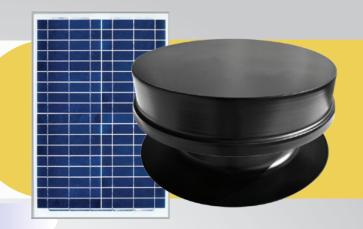

Technical Information

Weight

Fan Weight: 11.3 lbs / 5.1 kg

Fan Packaged: 32 lbs. / 14.5 kg

Performance

Air Flow Rate: 900 to 1500 CFM Depending on solar exposure Ventilation: Up to 1250 sq.ft. Attic must support intake air for best performance

Electrical

Solar Panel: 40 watt, 17 to 22 DC, 1.75 amp, 36 mono-crystalline cell, solar cells with black back sheet

Motor: Solaro Max Aire Brushless DC Motor,10-22VDC

Material

Housing System: Spun Formed, Aircraft Grade Aluminum Fan Blade: 12" Aluminum, Factory Balanced Mesh Screen: Stainless Steel, 1/4" Mesh, Rodent Control Wiring: 18 Gauge Copper Conductors

with PVC Insulation

Active Aire

Housing & Flashing System

Aircraft grade, spun-formed aluminum for the utmost quality protection

Inner housing system is aerodynamically designed to produce the highest possible radial air exhaust Powder coated outer shell



Solaro Max Aire Motor

AMERICAN MADE

Brushless Electronic Motor with Maximum Yield Technology. This new motor technology was developed by Solaro Energy - Our engineers leveraged lessons learned from our original brushless electronic motor that we used for over 12 years. This new motor technology offers about 30% better efficiency and air moving performance, with an amazing 100,000 hours average motor run time!

Mesh Screen

Constructed specifically for the Solaro Aire 1/4" mesh screen keeps animals and rodents out while allowing maximum air exhaust Stainless Steel



Components

Solar Panel

tempered glass

40 watt, 1.75 amp proprietary, high purity, mono-crystalline cell solar panel Weather proof in the most severe conditions High transparent, low iron



Built for maximum performance and safety

Fan Blade

Specifically designed for the Solaro Aire solar powered ventilation system

12" - 5 blade aluminum fan, aerodynamically optimized blade to improve airflow Operates whisper quiet throughout the day




Motor & Fan Mount


The Max Aire motor is mounted under the aluminum air deflector. Keeping it out of the air stream



Dimensions & Weight







Important Note: The Solaro Aire Attic Fan Ventilation System is 100% fire proof and all electrical components are hidden under the air diverting cowling creating an extremely safe and efficient ventilation system Limited Lifetime Warranty - See warranty details for additional information.

888-355-5786



solaroenergy.com