



Product Guide

S Series

S Series

Compact Wall Mount Air Handlers




The Premier Upgrade for Any System

Introducing S Series Wall Mount Air Handlers by ADP. S Series Wall Mounts are compact and lightweight solutions for multi-family housing applications.



Slide-in air filter included – no tools required for change out

Available in Copper or Aluminum

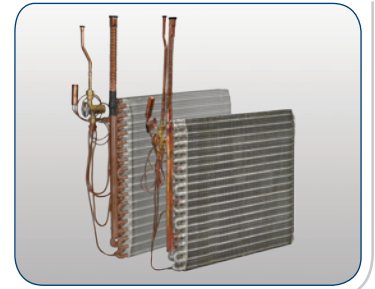


PSC or optional 5-speed high efficiency ECM motor:
240/208V, 60 Hz





Top refrigerant connections for easy brazing

Factory installed 5, 7.5, and 10 kW electric heat available

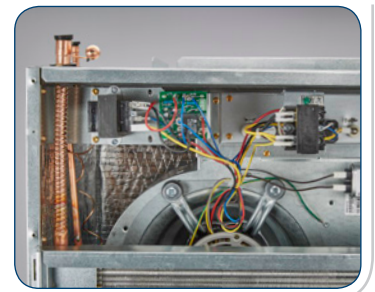

Factory or field installed TXV's with all threaded connections; no brazing required


Patent pending flexible copper tubing for easy motor access

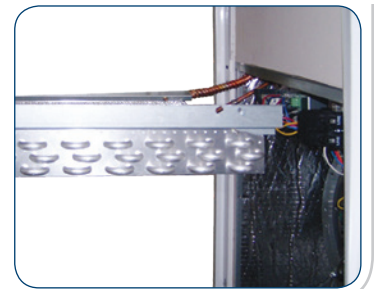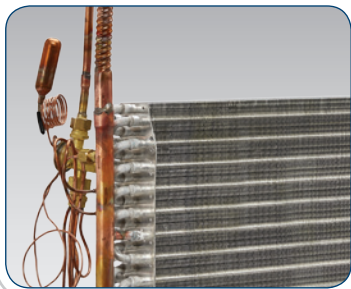




Low Height

Wall Mount Air Handler
Height Comparison

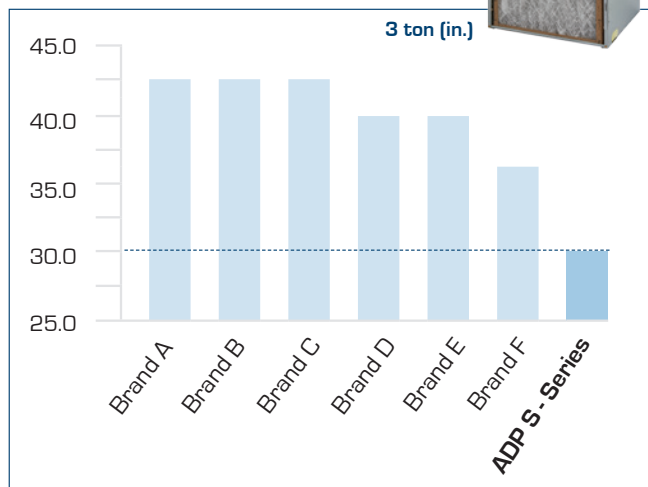

Light Weight

Aluminum Wall Mount Air Handler
Weight Comparison

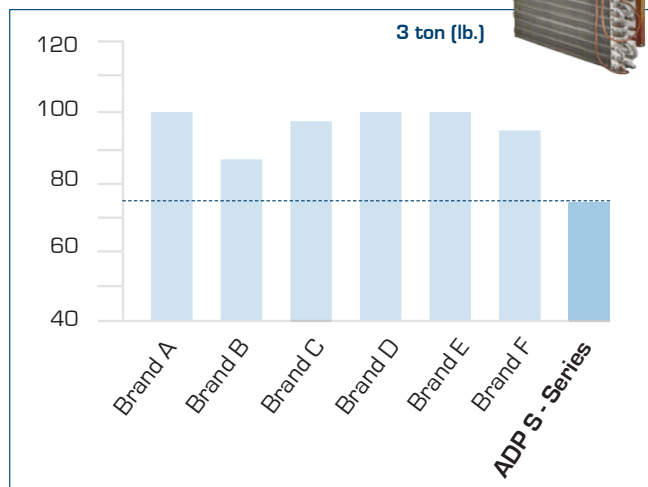

At only 30" tall on all models – ADP has the shortest wall mount cabinets on the market!

Weighing 80 lbs. or less, S Series wall mounts with aluminum technology can be a “one-man-job”.

The ADP Advantage

FLEXIBILITY

ADP tailors custom solutions to meet your unique market needs.

QUALITY

ADP proprietary testing technology ensures leak free performance at the higher operating pressures of R-410A systems.

SERVICE

ADP coils and air handlers are made for seamless installation and easy access.

ENERGY SAVINGS

Many models are available to achieve higher SEER levels for ENERGY STAR compliance, utility rebates, and federal tax credits.

WARRANTY

S Series wall mount air handlers feature an available 10-year limited warranty. Simply register online at www.adpwarranty.com.

Product Nomenclature



S M2 2 24 05

Series

S Series Wall Mount

Slab Number

Aluminum: M2, M3, M5, M6, M7

Copper: K1, K2, K3, K6, K7, L1, L5, L6

Metering Device

1: Piston (R-410A)

2: Piston (R-22)

6: Non-bleed A/C TXV (R-410A)

7: Bleed HP-A/C TXV (R-410A) ^[1]

8: Bleed A/C TXV (R-410A) ^[1]

9: Non-bleed HP-A/C TXV (R-410A)

Electric Heat ^[2]

05: 5 kW (all sizes)

07: 7.5 kW (all sizes)

10: 10 kW (all sizes)

Unit Size

18, 24, 30, 36: PSC Motor

19, 25, 31, 37: 5-Speed High Efficiency ECM Motor


[1] 7 and 8 valve options available only for York family products

[2] Pull disconnect only


Note: Minimum order quantities of 4 per model number

Air Handler Size	18	24	30	36
Height (in)	30	30	30	30
Depth (in)	18 ³ / ₄	18 ³ / ₄	18 ³ / ₄	18 ³ / ₄
Width (in)	22	22	22	22

Accessory kits available:



Wall hanging bracket



Float switch



Decorative Wall Panel & Closet Panel

Proudly distributed by:

2175 West Park Place Boulevard
Stone Mountain, Georgia 30087
www.adpnov.com

ISO 9001:2008
—Registered Quality System—



SL-SAH-06
August 2017